ventev

FAKRA Leads

Multiband 9-in-1 Dome Antenna w/ FAKRA Leads 4-Port 617-6000 MHz, 4-Port 2.4/5 GHz, 1-Port GNSS



202231

VM-UWG4410D-FKR

| * | Multiband 9-in-1 Dome Omnidirectional Antenna with |
|---|--|
| | FAKRA leads |

- 4x4 Ultra-wideband (617-6000MHz) to support MIMO/diversity at 4G/5G; 4x dual band 2.4/5GHz Wi-Fi and a GNSS/GPS antenna w/ 26dB gain LNA
- Indoor and Outdoor rated IP69K design with UV stabilized radome
- Compatible with Sierra XR90 gateway

For more information or to purchase, contact Ventev: 800.851.4965 or sales@ventev.com


| Electrical Specifications | | | | | | |
|--|--|----------------------------------|--------------------------------|----------------|--|--|
| Cable Leads Number | Cable 1 to 4 (4G/5G Elements) | | Cables 5 to 8 (Wi-Fi Elements) | | | |
| Frequency Bands, MHz | 617–960/1960-6000 | | 2400-2500/4900-6000 | | | |
| Gain, dBi | 617-960 MHz 1690-2700 MHz 3300-4200 MHz 4900-6000 MHz | 4 dBi 6 dBi 7 dBi 8 dBi | 2.4GHz 5GHz | 5 dBi 6 dBi | | |
| Polarization | Vertical | | | | | |
| Azimuth (HBW) | Omni (360°) | | | | | |
| Isolation, dBm | > 10 | | > 12 | | | |
| VSWR | ≤ 2.0 | | ≤ 2.0 | | | |
| Impedance, ohm | | 50 | 0 | | | |
| GNSS/GPS Antenna Specification (1562 – 1612 MHz) | | | | | | |
| VSWR | VSWR < 2.0 ± 4MHz | | | | | |
| Gain | Gain 26dB LNA | | | | | |
| Out of Band Rejection, dB | Band Rejection, dB > 40dB | | | | | |
| Typical Noise Figure, dB | -2.7 dB | | | | | |
| Operating Voltage | 3 – 5 VDC | | | | | |
| Typical Current, mA | | 15 | | | | |

Every Ventev antenna is RoHS compliant and covered by company's 2-year warranty program.

ventev

Multiband 9-in-1 Dome Antenna w/ FAKRA Leads 4-Port 617-6000 MHz, 4-Port 2.4/5 GHz, 1-Port GNSS

| Mechanical Specifications | | | | | | |
|---------------------------|---|--|--|--|--|--|
| Product Dims (Dia x H) | Ø175 x 80 mm (Ø7.0 x 3.15 in) | | | | | |
| Input Connector / Pigtail | Cellular Cables (leads #1 to 4) : FAKRA D (Purple) Female; 17ft Pigtail w/ RG58 | | | | | |
| | Wi-Fi Cables (leads #5 to 8): FAKRA I (Beige) Female; 17ft Pigtail w/ RG58 | | | | | |
| | GNSS/GPS Cable (lead #9): FAKRA C (Blue) Female; 17ft Pigtail w/ RG174 | | | | | |
| Radome | UV Stabilized ABS. White | | | | | |
| | (Black color option available with 25unit MOQ; Contact Ventev Sales) | | | | | |
| Operating Temperature | -40 °C to +80 °C (-40 °F to +176 °F) | | | | | |
| Ingress Protection | IP69K | | | | | |
| Mounting | Through 1.0" hole using stainless Nut; Silicone O-ring included; | | | | | |
| | Adhesive backed sealing pad on the back to minimize shaking | | | | | |
| Application | Indoor or Outdoor | | | | | |
| Product Weight | 1.8Kg (4.0 lbs) | | | | | |

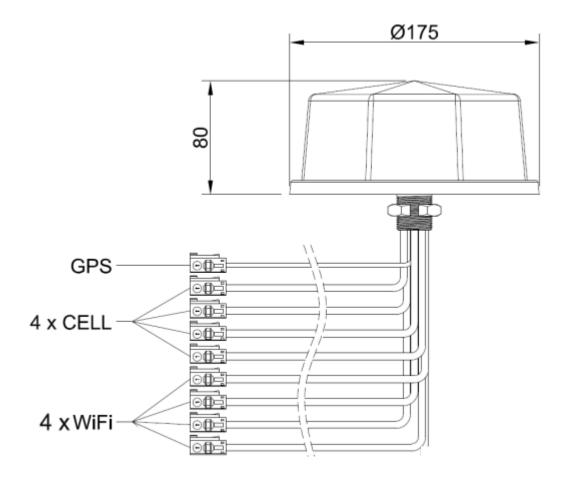

Every Ventev antenna is RoHS compliant and covered by company's 2-year warranty program.

Page 2 of 2