


# 806-960 MHz, Yagi Antenna, 8-Element 11dBi, 48° HBW, N Female

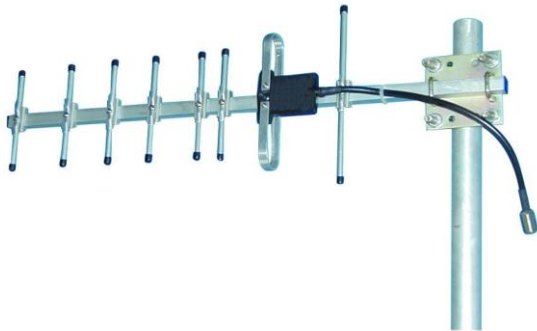

- ❖ High gain (11dBi) Yagi antenna covering the 806-960 MHz frequency range
- ❖ Highly durable and rugged Aluminum construction w/ 8-element design
- ❖ Applications in DAS, Utilities, Oil & Gas, Mining, Industrial, Transportation, Irrigation and many more
- ❖ Includes mounting bracket and hardware
- ❖ Supports both Vertical or horizontal polarization

Connector Option	Product SKU	Ventev Part #
N Female	342474	T09110Y11206

**For more information or to purchase, contact Ventev:**  
800.851.4965 or sales@ventev.com.


Electrical Specifications	
Frequency Bands, MHz	806-960
Polarization	Linear
Azimuth (HBW)	48°
Elevation (VBW)	40°
VSWR	≤1.5
Gain, dBi	11
Front-to-Back Ratio (dB)	≥ 16 dB
Max Input Power per Port, watts	100
Impedance, ohm	50
Mechanical Specifications	
Product Dimensions	24 x 19 x 7.5"
Input Connector	1x N Female, 30" Pigtail
Mounting	Mast / Pole (diameter 1.5" to 2")
Operating Temperature	-22° - 158°F
Wind Survival	150 mph (240 Kmph)
Product Weight	2 lb

Note: Mast not included

Every Ventev antenna is RoHS compliant and covered by company's 2-year warranty program.

# 806-960 MHz, Yagi Antenna, 8-Element 11dBi, 48° HBW, N Female

## Radiation Patterns

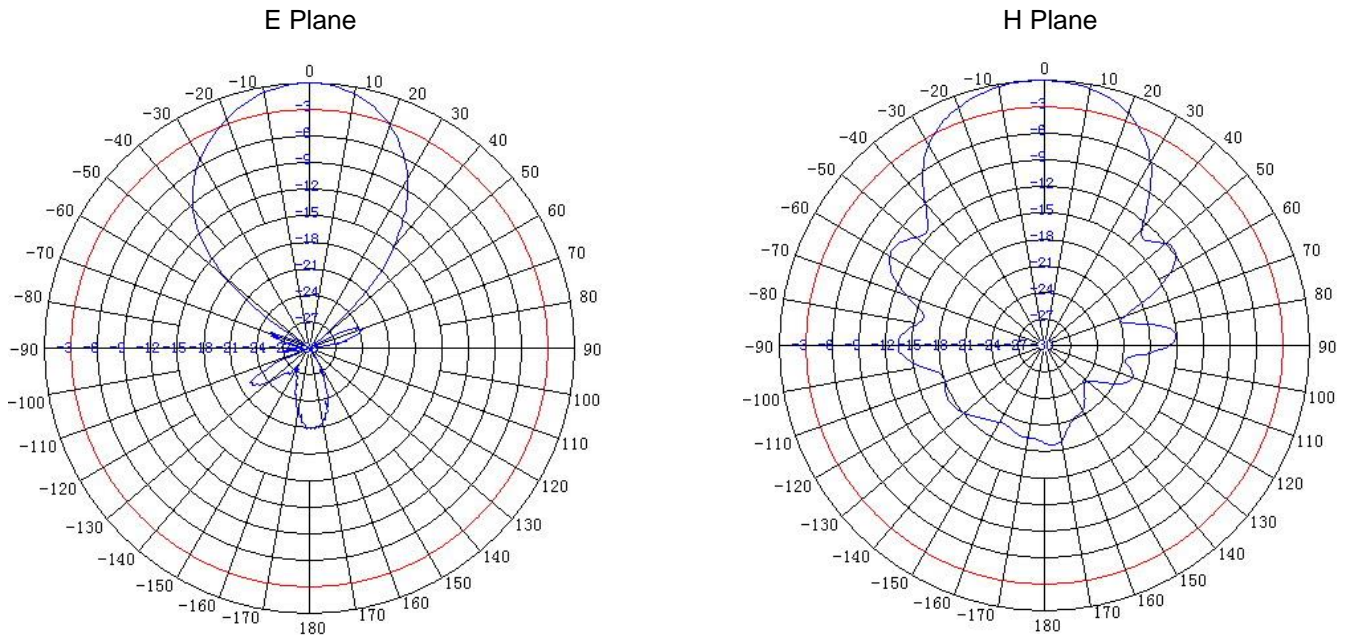

## MOUNT INFORMATION

### To Mount Antenna in Vertical Polarization

As shown in the picture below, all antenna grids are vertically pointing to ground.

### To Mount Antenna in Horizontal Polarization

1. Loosen the clamp and pull out the antenna
2. Rotate the clamp by 90 degree and push back onto the antenna. Tighten the clamp firmly.
3. Install the antenna such that all grids are pointing parallel (horizontally) to the ground.

