

2.4/5 GHz 8/6.5 dBi Wi-Fi Patch Antenna with 4 N Male Connectors

Ventev's TerraWave 2.4/5GHz 8/6.5 dBi High Density Multiple-Input and Multiple-Output (MIMO) directional Wi-Fi antenna is optimized to work with Meraki's MR 66/72/74/84/86 access points. The antenna's gain and narrow beamwidths deliver on the modern user demand for high-capacity connectivity. The 4 dual-band leads offer exceptional performance, and alleviate the need to buy two separate 2-lead antennas for the AP. A Universal Articulating Mount enables the antenna to be positioned precisely where coverage is needed most. Includes mounting hardware to support mast and/or wall mounting.

Every Ventev antenna is RoHS compliant and covered by Ventev's two-year TerraNet warranty program.


For more information or to purchase, contact Ventev: 800.851.4965 or sales@ventev.com.



SPECIFICATIONS

| | |
|-----------------------|------------------|
| SKU | 261498 |
| Model Number | M6080060DP33607 |
| Frequency Range | 2.4/5 GHz |
| Gain | 8/6.5 dBi |
| Vertical Beamwidth | 65°/70° |
| Polarization | 60°/65° |
| VSWR | <2 |
| Normal Impedance | 50 Ohms |
| Number of Ports/Cable | 4 |
| Connector Type | N Male |
| Cable Length | 24 in |
| Dimensions | 7.5 x 7.5 x .15" |
| Weight | 2.5 lb |
| Application | Indoor/Outdoor |
| Operating Temperature | -40°F to 140°F |

Radiation Patterns

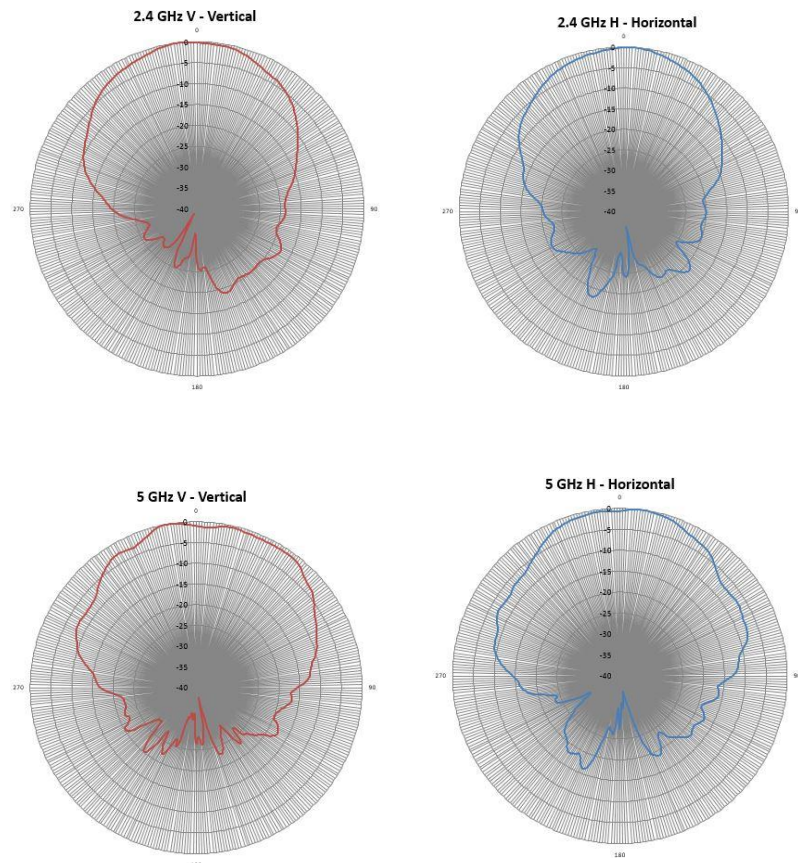

Terrawave by Ventev

2.4/5 GHz 8/6.5 dBi Wi-Fi Patch Antenna with 4 N Male Connectors

Universal Articulating Mount

SPECIFICATIONS

Model: TW-ART-MOUNT-MS

Dimensions: 6" (L) x 3" (W) x 3" (H)

Material: Zinc-Plated Steel

Operating Temperature Range: -40°F x +158°F

Mounting Style: Pole or Wall Mount

Mast Diameter: 2.125 to 2.5

Maximum Load: 25 lbs.

Wind Speed Range: < = 100

