


PART NO.		P2RFC-2064-XX		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	09/27/16	JDMc

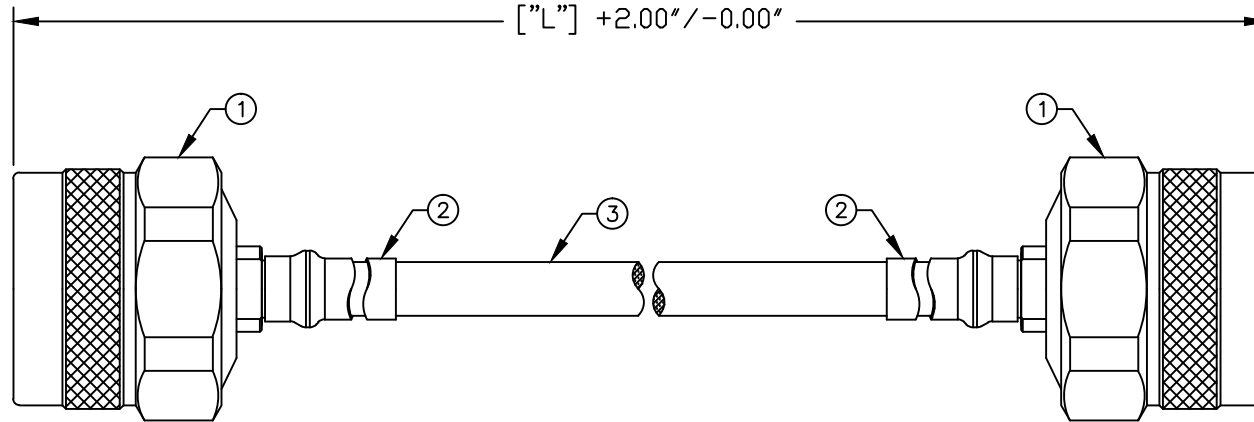

P2RFC-2064-XX
 └───┬───┬───
 └───┬───┬─── [“L”] LENGTH IN INCHES
 └───┬───┬─── CONFIGURATION ID
 └───┬───┬─── CABLE ASSEMBLY DESIGNATOR

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-6 GHz
 3RD ORDER IM: ≤-155 dBc @ 700MHz & 1900MHz
 3RD ORDER IM TEST METHOD: 2x43dBm CARRIERS
 VSWR: ≤1.15:1 THRU 3GHz

NOTE: BOTH CONNECTORS WILL HAVE PROTECTIVE CAPS ON

3	TFT-402-LF	1	PLENUM CABLE	---
2	TUBING	2	HEAT SHRINK	---
1	RFN-1002-SR2FL	2	N MALE CONNECTOR	WHITE BRONZE
#	PART NUMBER	QTY	DESCRIPTION	FINISH

CUSTOMER OUTLINE DRAWING	
ALL DIMENSIONS ARE REFERENCE ONLY	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	
DRAWN C. ZUNIGA	09/27/16
CHECKED	
ORJ DRAWN C. ZUNIGA	09/27/16

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES; ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM VENTEV. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

N MALE TO N MALE			
CABLE ASSEMBLY			
SIZE A	CABLE GROUP -	DWG NO. P2RFC-2064-XX	REV -
SCALE: NTS	ENGINEERING ID: 000000	SHEET 1 OF 1	