

PART NO.

P2RFC-2074-XX

REV

DESCRIPTION

DWN

DATE

APPROVED

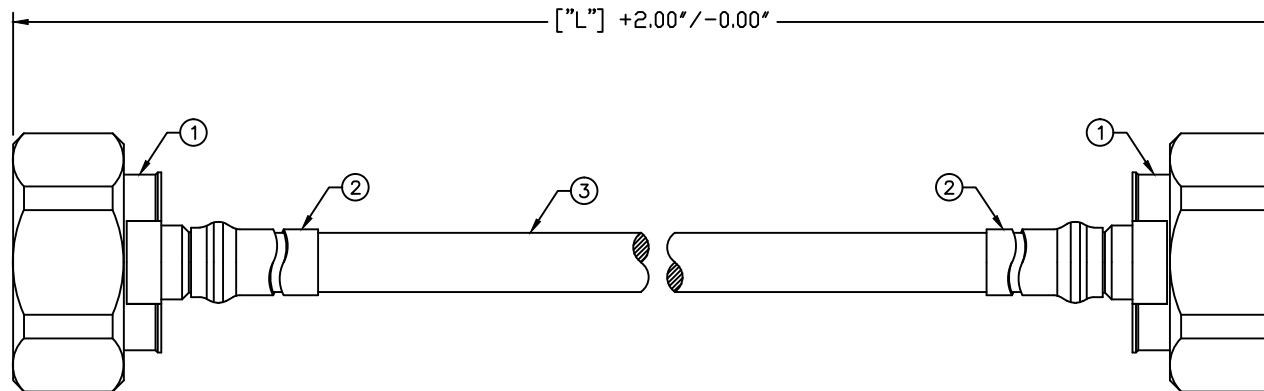
-

ENGINEERING RELEASE

CZS

11/01/16

JDMc

P2RFC-2074-XX

[\"L\"] LENGTH IN INCHES

CONFIGURATION ID

CABLE ASSEMBLY DESIGNATOR

SPECIFICATIONS:

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-6 GHz

3RD ORDER IM: ≤ -155 dBc @ 700MHz & 1900MHz

3RD ORDER IM TEST METHOD: 2x43dBm CARRIERS

VSWR: $\leq 1.15:1$ THRU 3GHz

FOR: SPP-250-LLPL, SPO-250 & FSJ1-50A

NOTE: BOTH CONNECTORS WILL HAVE PROTECTIVE CAPS ON

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

DRAWN

C. ZUNIGA

11/01/16

CHECKED

ORJ DRAWN

C. ZUNIGA

11/01/16

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
VENTEV. ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
VENTEV. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.

ventev®**7/16 DIN MALE TO 7/16 DIN MALE**

CABLE ASSEMBLY

SIZE

A

CABLE GROUP

HPL

DWG NO.

P2RFC-2074-XX

REV

—

SCALE:

NTS

ENGINEERING ID:

000000

SHEET 1 OF 1

3	COAX CABLE	1	1/4" SUPER FLEXIBLE	---
2	TUBING	2	HEAT SHRINK	---
1	RFD-1601-HPL	2	7/16 DIN MALE CONNECTOR	WHITE BRONZE
#	PART NUMBER	QTY	DESCRIPTION	FINISH