| REVISION | | |
|---|---|---|
| ISS | ZONE | DESCRIPTION |
| | | |

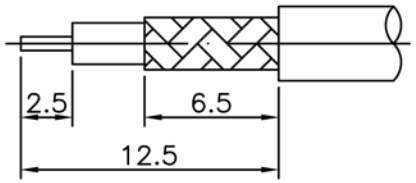


Recommended Stripping Dimensions

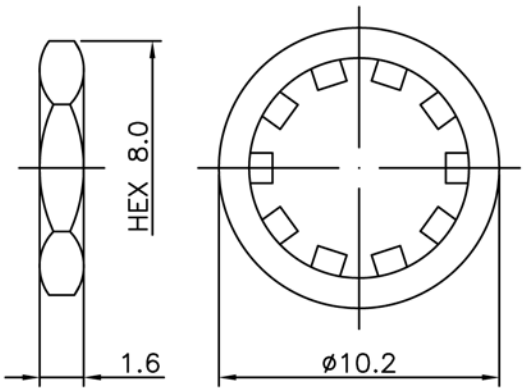


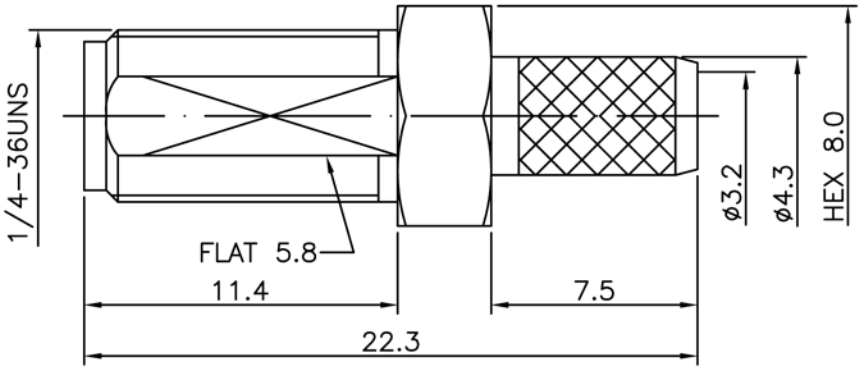


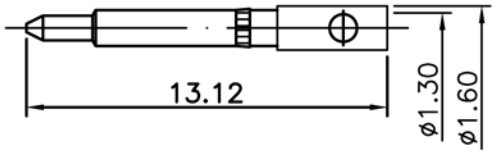


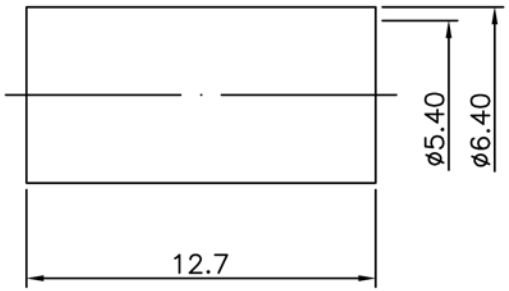


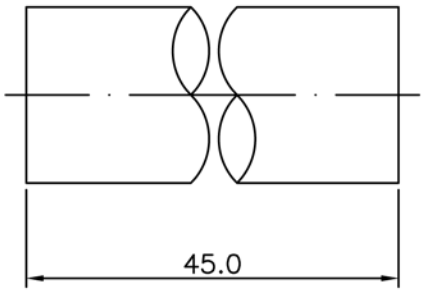


NOTE:
1.Impedance: 50Ω
2.Frequency Range: DC 0–18 GHz
3.V.S.W.R: 1.3 MAX.@ 6GHz
4.Voltage Rating: 375V rms
5.Contact Resistance: Center Contacts: 2.0 mΩ Max
Outer Contacts: 2.0 mΩ Max
6.Insulation Resistance: 5000 MΩ MIN.
7.Operating Temperature Range: −65˚~165˚C
8.ROHS Compliance.

| NO. | DESCRIPTION | MATERIAL | FINISH | Q'TY | DRAWN NO. |
|---|---|---|---|---|---|
| 7 | HEAT TUBING | PE | BLACK | 1 | H–0039 |
| 6 | FERRULE | BRASS | GOLD | 1 | M–0046 |
| 5 | CONTACT PIN | BRASS | GOLD | 1 | C–0660 |
| 4 | BODY | BRASS | GOLD | 1 | B–0817 |
| 3 | INSULATOR A | TEFLON | NONE | 1 | T–0474 |
| 2 | WASHER | BRASS | GOLD | 1 | G–0017 |
| 1 | NUT | BRASS | GOLD | 1 | D–0008 |

TOLERANCES
DIMENSIONS ARE IN MILLIMETER
UNLESS OTHERWISE SPECIFIED
.X ±0.2
.XX ±0.1
.XXX ±0.05
ANGLES ±5˚

SCALE 4/1 ISSUE A–0

TITLE: RPSMA Bulkhead Jack for TWS-195 Cable

PART NO.: CON-30-195

DRAWN NO.:

FILE PATH:

TerraWave Solutions

APPROVED DATE

CHECKED DATE

DRAWN DATE