REVISIONS		
ISS	SYMBOL	DESCRIPTION\DATE

FOR CUSTOMER

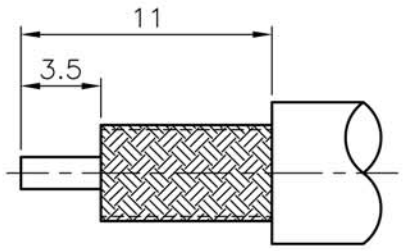

RECOMMENDED
CABLE STRIPPING DIM'S

REMARK: RoHS COMPLIANT

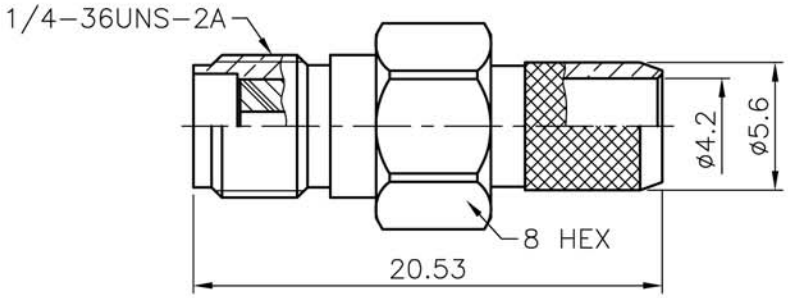

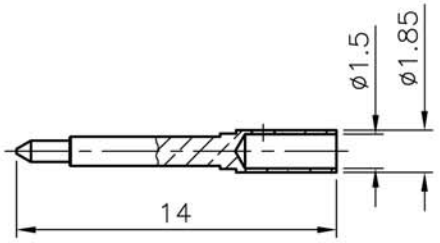

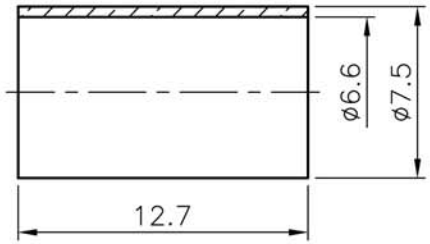



NOTES: FINISH (PLATING THICKNESS IN MICRO–INCHES)
1. BRASS PER QQ–B–626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL–P–19468
5. BRASS JIS H 3250, C 2700

1. CRIMPED FERRULE
HEX CRIMP SIZE .255" (6.48mm)

2. CONTACT PIN TO SOLDER

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
	HEAT SHRINK TUBE		BLACK		
	FERRULE	NOTE 5	NOTE 2		
	CONTACT PIN	NOTE 1	NOTE 3		
	INSULATOR	NOTE 4	WHITE		
	BODY	NOTE 1	NOTE 2		

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED TOLERANCES

0.5~6 = ±0.2
>6~30 = ±0.4
>30~120 = ±0.6
>120~315 = ±1
>315~1000 = ±1.6
ANGLES = ±5°

SCALE 3/1 ISSUE A1

PART NO. CON-19-240

APPROVED DATE

CHECKED DATE

DRAWN DATE

TerraWave Solutions

TITLE
RPSMA Jack for TWS-240 Cable

DRAWING NO.

FILE NO.