REVISION		
ISS	ZONE	DESCRIPTION

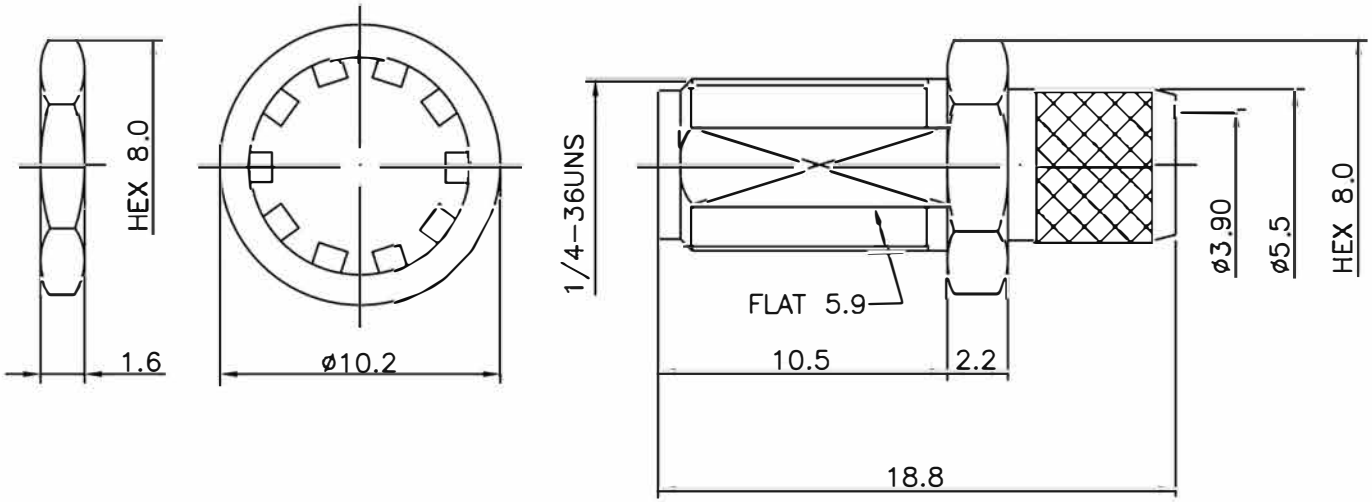

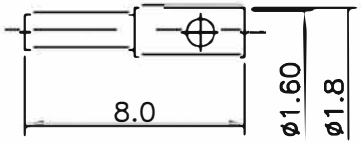

NOTE:
1. Impedance: 50Ω
2. Frequency Range: DC 0–18 GHz
3. V.S.W.R.: 1.3 MAX.@ 6GHz
4. Voltage Rating: 500V rms
5. Contact Resistance: Center Contacts: 2.0 mΩ Max
   Outer Contacts: 2.0 mΩ Max
6. Insulation Resistance : 5000 MΩ MIN.
7. Interface in Accordance With: MIL-STD-348A
8. Operating Temperature Range:-65°~165°C
9. ROHS Compliance.

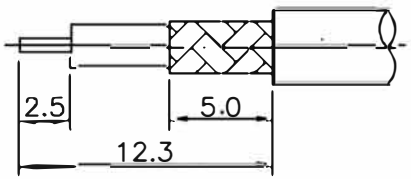

Recommended Stripping Dimensions

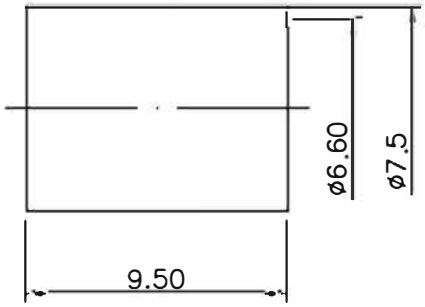

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.
7	FERRULE	BRASS	GOLD	1	M-0066
6	PIN	Be Cu	GOLD	1	C-0323
5	BODY	BRASS	GOLD	1	B-0416
4	INSULATOR A	TEFLON	NONE	1	T-0267
3	WASHER	BRASS	GOLD	1	F-0023
2	WASHER	BRASS	GOLD	1	G-0017
1	NUT	BRASS	GOLD	1	D-0008

TOLERANCES
DIMENSIONS ARE IN MILLIMETER
UNLESS OTHERWISE SPECIFIED
.X ±0.2
.XX ±0.1
.XXX ±0.05
ANGLES ±5°

SCALE 4/1 | ISSUE A-0 | FILE PATH:

TITLE: SMA Jack for TWS-240 Cable
PART NO.: CON-17-240
DRAWN NO.:

APPROVED DATE
CHECKED DATE
DRAWN DATE