


REVISION		
ISS	ZONE	DESCRIPTION
A-1		

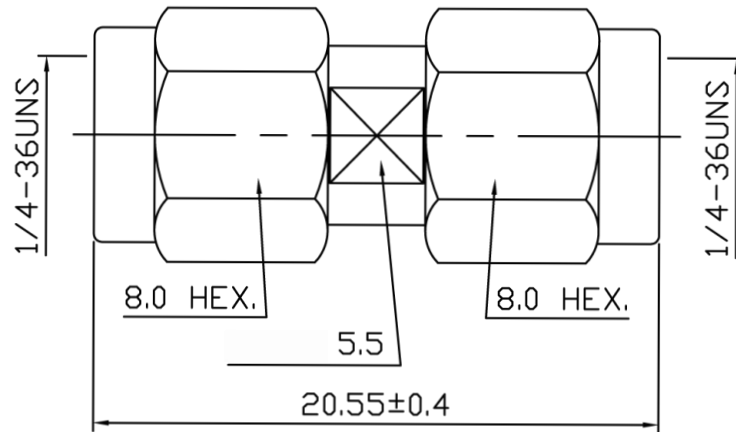

- NOTE:
- 1.Impedance: 50Ω
 - 2.Frequency Range: DC 0-18 GHz
 - 3.VSWR: 1.22 Max.
 - 4.Voltage Rating: 750V rms
 - 5.Contact Resistance: Center Contacts: 2 mΩ Max
Outer Contacts: 2 mΩ Max
 - 6.Insulation Resistance: 5000 MΩ MIN.
 - 7.Operating Temperature Range: -65°~165°C
 - 8.ROHS Compliance.

6	CENTER CONTACT	Be Cu	GOLD	1	C-0682
5	INSULATOR	TEFLON	NONE	1	T-0497
4	BODY	BRASS	GOLD	1	B-0057
3	WASHER	STAINLESS STEEL	NONE	2	G-0002
2	GASKET	SILICONE	NONE	2	R-0001
1	SHELL	BRASS	GOLD	2	A-0002
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.

TOLERANCES
DIMENSIONS ARE IN MILLIMETER

UNLESS OTHERWISE SPECIFIED	
.X	±0.2
.XX	±0.1
.XXX	±0.05
ANGLES	±5°

TITLE
RPSMA Plug to RPSMA Plug Adapter
PART NO. RPSMAP-RPSMAP
DRAWN NO.
FILE PATH:

APPROVED	DATE
CHECKED	DATE
DRAWN	DATE