



REVISION		
ISS	ZONE	DESCRIPTION

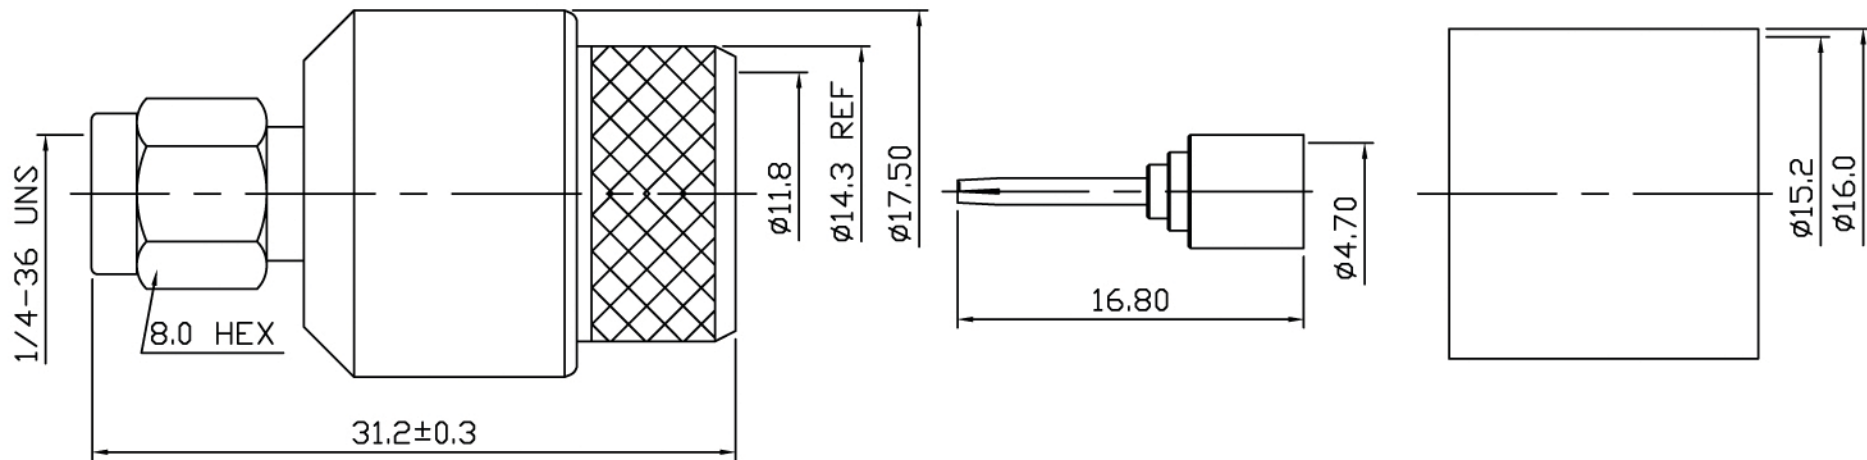

- NOTE:
- 1.Impedance: 50Ω
 - 2.Frequency Range: DC 0-18 GHz
 - 3.V.S.W.R: 1.3 @ 6 GHz MAX.
 - 4.Voltage Rating: 1000V rms
 - 5.Contact Resistance: Center Contacts: 2 mΩ Max
Outer Contacts: 2 mΩ Max
 - 6.Insulation Resistance: 5000 MΩ MIN.
 - 7.Operating Temperature Range: -65°~165°C
 - 8.RDHS Compliance.



RECOMMENDED
CABLE STRIPPING DIM'S

						TOLERANCES				RPSMA Plug for TWS-600 Cable Captivated Center Pin		TerraWave Solutions	
						DIMENSIONS ARE IN MILLIMETER				PART NO.		APPROVED	
						UNLESS OTHERWISE SPECIFIED				DRAWN NO.		CHECKED	
										FILE PATH:		DRAWN	
8	FERRULE	BRASS	GOLD	1	M-0339	.X		±0.2					
7	CENTER CONTACT	Be Cu	GOLD	1	9804050D	.XX		±0.1					
6	CHASSIS	BRASS	GOLD	1	9804050E	.XXX		±0.05					
5	BODY	BRASS	GOLD	1	9804050B	ANGLES		±5°					
4	INSULATOR	TEFLON	NONE	1	9804050C								
3	WASHER	SUS 304	NONE	1	G-0002								
2	GASKET	SILICONE	NONE	1	R-0001								
1	SHELL	BRASS	GOLD	1	A-0002								
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.	SCALE	2/1	ISSUE	A-0	FILE PATH:			