

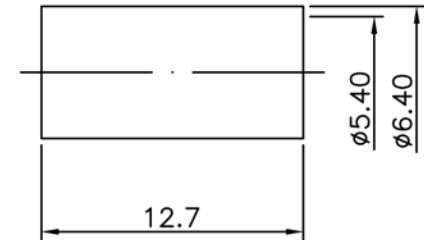
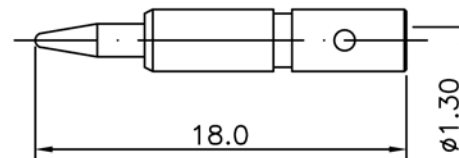


1			2			3			4			5			6			7			8		
REVISION																							
ISS	ZONE	DESCRIPTION																					

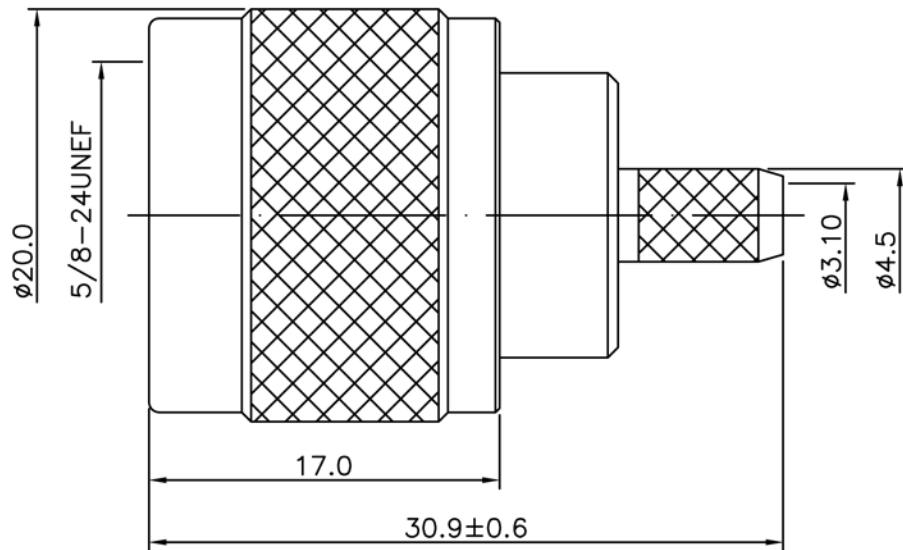

- NOTE:
1. Impedance: 50Ω
 2. Frequency Range: DC 0-11 GHz
 3. V.S.W.R.: 1.3 MAX. @ 6GHz
 4. Voltage Rating: 1500V rms
 5. Contact Resistance: Center Contacts: 1.0 mΩ Max
Outer Contacts: 1.0 mΩ Max
 6. Insulation Resistance : 5000 MΩ MIN.
 7. Interface in Accordance With: MIL-STD-348A
 8. Operating Temperature Range: -65°~165°C
 9. ROHS Compliance.

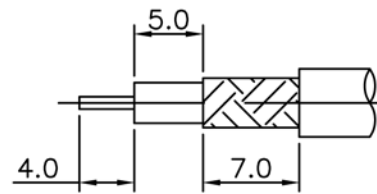

Recommended Stripping Dimensions

9	FERRULE	BRASS	NICKEL	1	M-0046	TOLERANCES				TITLE		TerraWave Solutions	
8	PIN	BRASS	GOLD	1	C-0410	DIMENSIONS ARE IN MILLIMETER				N-Style Plug for TWS-200 Cable		APPROVED	
7	BARREL	BRASS	NICKEL	1	E-0017	UNLESS OTHERWISE SPECIFIED				PART NO.		DATE	
6	BODY	BRASS	NICKEL	1	B-0832	.X ±0.2				CON-07-200		CHECKED	
5	INSULATOR	TEFLON	NONE	1	T-0483	.XX ±0.1				DRAWN NO.		DATE	
4	WASHER	BRASS	NICKEL	1	G-0019	.XXX ±0.05				FILE PATH:		DRAWN	
3	CHASSIS	BRASS	NICKEL	1	E-0029	ANGLES ±5°						DATE	
2	GASKET	SILICONE	NONE	1	R-0004								
1	SHELL	BRASS	NICKEL	1	A-0009								
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.	SCALE	3/1	ISSUE	A-1				

1 2 3 4 5 6 7 8