





TerraWave Solutions® 902-928 MHz 15 dBi 120 Degree Sector Panel Antenna with N-Style Jack Connector

TerraWave's 15 dBi sector panel antenna is specially designed for applications operating in 902-928 MHz frequency, including radio frequency identification (RFID), land mobile, location monitoring systems (LMS), and ISM applications. It features high gain and vertical polarization. Includes a heavy duty mounting bracket and an N-style Jack connector. Every TerraWave antenna is covered by the Company's two-year TerraNet warranty program. For questions and to purchase product, contact a regional sales executive at 210-375-8482, 800-851-4965 or sales @terrawave.com. Visit www.terrawave.com for additional information.

Specifications	
Model	T09150P10006120
Frequency Range	902 ~ 928 MHz
Bandwidth	26 MHz
Gain	15 dBi
Horizontal Beamwidth	120°
Vertical Beamwidth	6.5°
Front-to-Back Ratio	≥ 18 dB
VSWR	≤ 1.5
Nominal Impedance	50 Ohms
Maximum Power Rating	100 Watts
Polarization	Vertical
Connector	N-Style Jack
Dimensions	86.9" x 7" x 2.5"
Weight	17.2 lbs
Wind Load	120 mph
Radome	ABS
Mast Mount Diameter	Ø2.0" ~ Ø3.0"
Operating Temperature Range	-22°F to +158°F

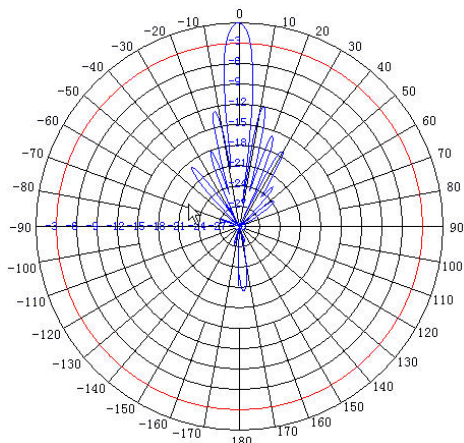

E-Plane Pattern

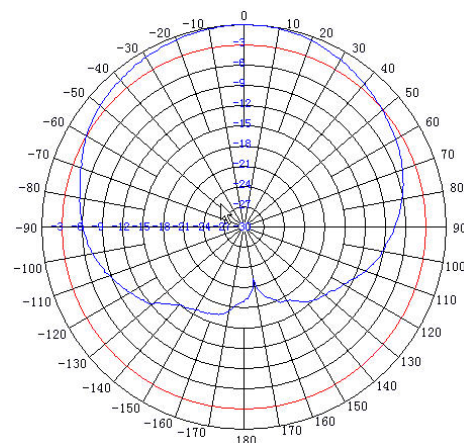

H-Plane Pattern



**TerraWave Solutions® 902-928 MHz 15 dBi 120 Degree
Sector Panel Antenna with N-Style Jack Connector**

Mounting Bracket Information for T09150P10006120

