REVISION		
ISS	ZONE	DESCRIPTION

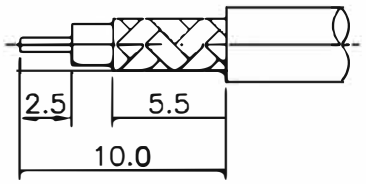

Recmmended Stripping Dimensions

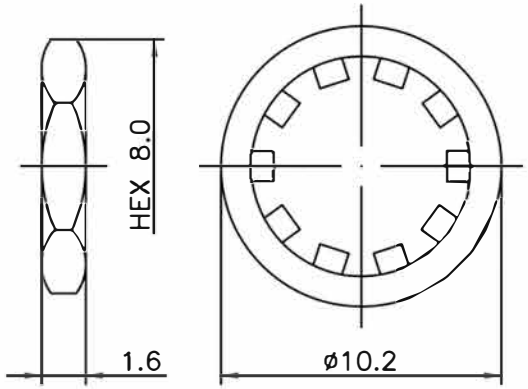

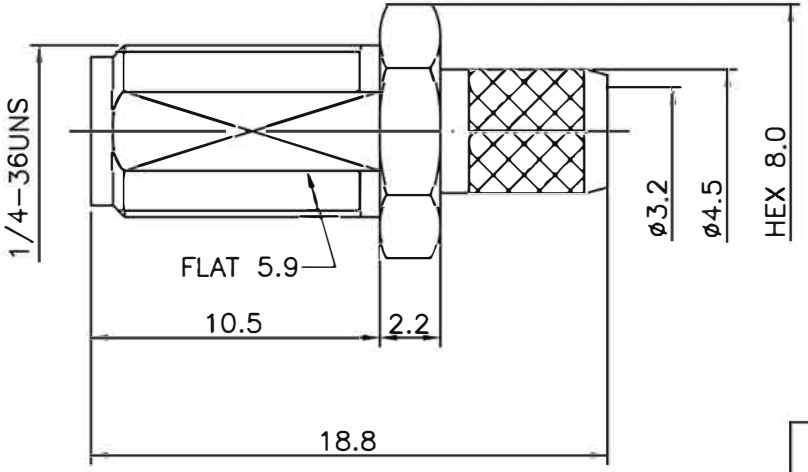

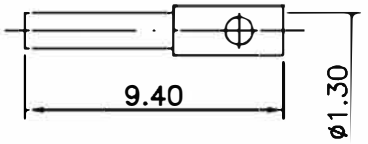

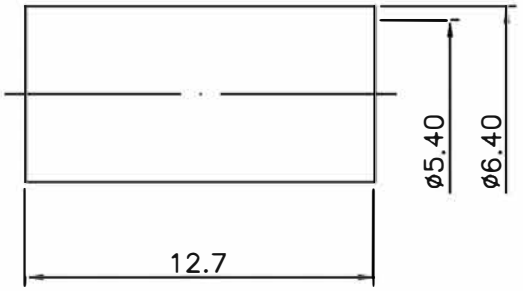

NOTE:
1. Impedance: 50Ω
2. Frequency Range: DC 0–18 GHz
3. V.S.W.R.: 1.3 MAX.@ 6GHz
4. Voltage Rating: 500V rms
5. Contact Resistance: Center Contacts: 2.0 mΩ Max
   Outer Contacts: 2.0 mΩ Max
6. Insulation Resistance : 5000 MΩ MIN.
7. Interface in Accordance With: MIL–STD–348A
8. Operating Temperature Range:–65°~165°C
9. ROHS Compliance.

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.
7	FERRULE	BRASS	GOLD	1	M–0046
6	PIN	Be Cu	GOLD	1	C–0423
5	BODY	BRASS	GOLD	1	B–0219
4	INSULATOR A	TEFLON	NONE	1	T–0263
3	WASHER	BRASS	GOLD	1	F–0023
2	WASHER	BRASS	GOLD	1	G–0017
1	NUT	BRASS	GOLD	1	D–0008

TOLERANCES
DIMENSIONS ARE IN MILLIMETER
UNLESS OTHERWISE SPECIFIED
.X ±0.2
.XX ±0.1
.XXX ±0.05
ANGLES ±5°

SCALE 4/1 | ISSUE A–0 | FILE PATH:

TITLE: SMA Bulkhead Jack for TWS-200 Cable

PART NO.: CON-23-200

DRAWN NO.:

VENTEV

APPROVED

CHECKED DATE

DRAWN DATE