


REVISION		
ISS	ZONE	DESCRIPTION
A-1		

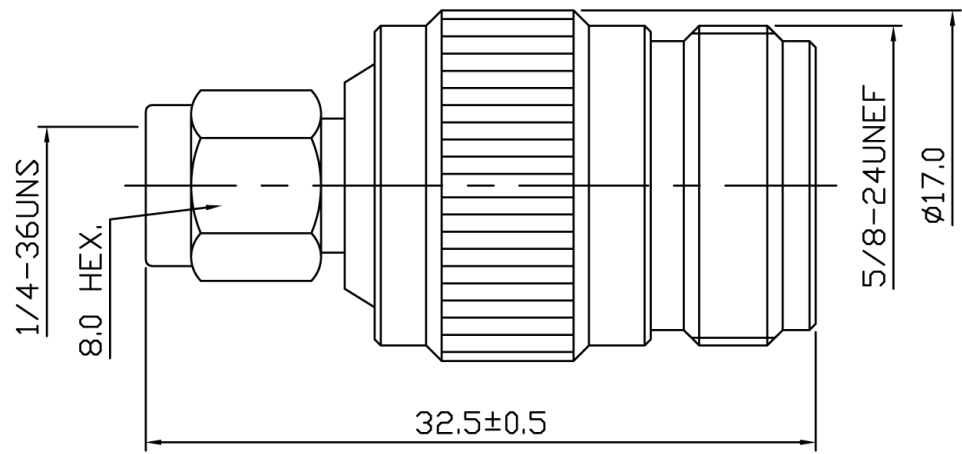

- NOTE:
1. Impedance: 50Ω
 2. Frequency Range: DC 0-11 GHz
 3. V.S.W.R.: 1.3 MAX.
 4. Voltage Rating: 750V rms
 5. Contact Resistance: Center Contacts: 2 mΩ Max
Outer Contacts: 2 mΩ Max
 6. Insulation Resistance: 5000 MΩ MIN.
 7. Interface in Accordance With: MIL-STD 348A
 8. Operating Temperature Range: -55°~125°C
 9. RoHS Compliance.

7	CENTER CONTACT	Be Cu	GOLD	1	C-0089
6	INSULATOR	TEFLON	NONE	1	T-0092
5	BODY B	BRASS	NICKEL	1	B-0150
4	BODY A	BRASS	NICKEL	1	E-0014
3	WASHER	STAINLESS STEEL	NONE	1	G-0002
2	GASKET	SILICONE	NONE	1	R-0001
1	SHELL	BRASS	NICKEL	1	A-0002
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.

TOLERANCES			
DIMENSIONS ARE IN MILLIMETER			
UNLESS OTHERWISE SPECIFIED			
.X	±0.2		
.XX	±0.1		
.XXX	±0.05		
ANGLES	±5°		
SCALE	3/1	ISSUE	A-1

TITLE	RPSMA Plug to N-Style Jack Adapter
PART NO.	RPSMAP-NJ
DRAWN NO.	
FILE PATH:	

APPROVED	DATE
CHECKED	DATE
DRAWN	DATE