


- NOTE:
- 1.Impedance: 50Ω
 - 2.Frequency Range: DC 0-11 GHz
 - 3.V.S.W.R.: 1.3 MAX.@6GHz
 - 4.Voltage Rating: 1500V rms
 - 5.Contact Resistance: Center Contacts: 1 mΩ Max
Outer Contacts: 1 mΩ Max
 - 6.Insulation Resistance: 5000 MΩ MIN.
 - 7.Interface in Accordance With: MIL-STD-348A
 - 8.Operating Temperature Range:-65°~165°C
 - 9.ROHS Compliance.

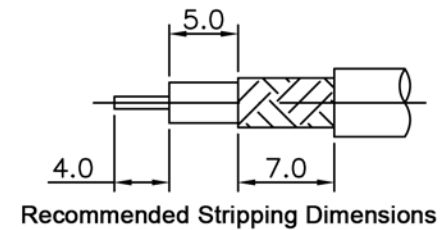

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.	SCALE	3/1	ISSUE	A-2	FILE PATH:			
9	FERRULE	BRASS	NICKEL	1	M-0067	TOLERANCES				TITLE N-Style Plug for TWS-240 Cable	TerraWave Solutions		
8	PIN	BRASS	GOLD	1	C-0366	DIMENSIONS ARE IN MILLIMETER							
7	BARREL	BRASS	NICKEL	1	E-0093	UNLESS OTHERWISE SPECIFIED				PART NO. CON-07-240	APPROVED	DATE	
6	BODY	BRASS	NICKEL	1	B-0832	.X	±0.2				CHECKED	DATE	
5	INSULATOR	TEFLON	NONE	1	T-0483	.XX	±0.1			DRAWN NO.	DRAWN	DATE	
4	WASHER	BRASS	NICKEL	1	G-0019	.XXX	±0.05						
3	CHASSIS	BRASS	NICKEL	1	E-0029	ANGLES	±5°						
2	GASKET	SILICONE	NONE	1	R-0004								
1	SHELL	BRASS	NICKEL	1	A-0009								