
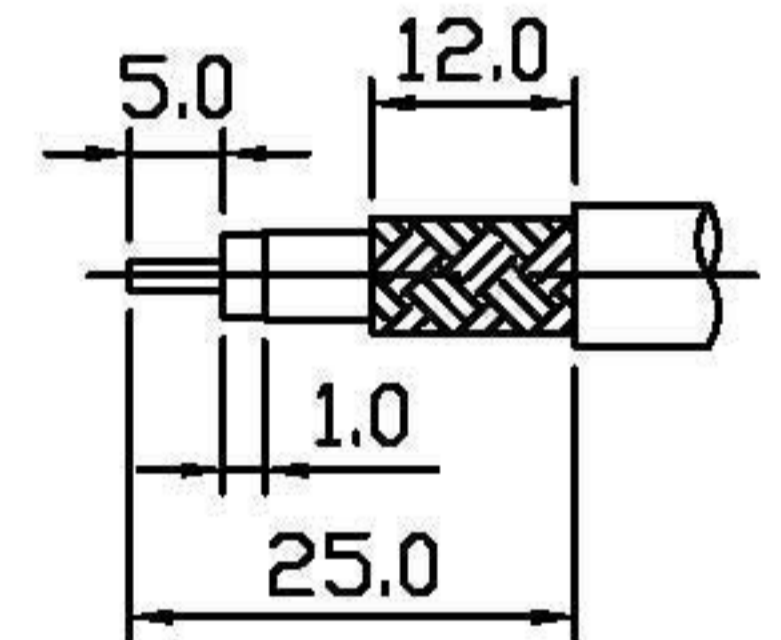


- NOTE:
1. Impedance: 50Ω
 2. Frequency Range: DC 0-11 GHz
 3. V.S.W.R: 1.3 MAX. @ 6GHz
 4. Voltage Rating: 1500V rms
 5. Contact Resistance: Center Contacts: 1.0 mΩ Max
Outer Contacts: 1.0 mΩ Max
 6. Insulation Resistance: 5000 MΩ MIN.
 7. Interface in Accordance With: MIL-STD 348A
 8. Operating Temperature Range: -65°~165°C
 9. ROHS Compliance.

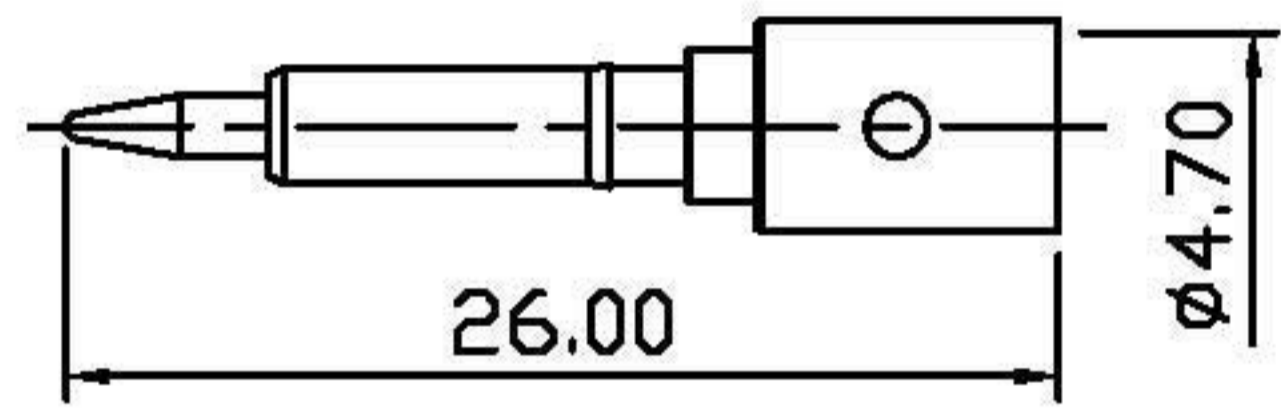

STRIPPING DIMENSION

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.
9	HEAT TUBING	PE	BLACK	1	H-0068
8	FERRULE	BRASS	WHITE BRONZE	1	M-0403
7	BODY	BRASS	WHITE BRONZE	1	B-0916
6	INSULATOR	TEFLON	NONE	1	T-0593
5	WASHER	BRASS	NONE	1	G-0019
4	CHASSIS	BRASS	WHITE BRONZE	1	E-0029
3	GASKET	SILICONE	NONE	1	R-0004
2	CENTER CONTACT	BRASS	GOLD	1	C-0759
1	SHELL	BRASS	WHITE BRONZE	1	A-0083

TOLERANCES				
DIMENSIONS ARE IN MILLIMETER				
UNLESS OTHERWISE SPECIFIED				
.X		±0.2		
.XX		±0.1		
.XXX		±0.05		
ANGLES		±5°		

TITLE	N PLUG STRAIGHT CRIMP FOR LMR600 CABLE
PART NO.	11-01-9-LMR600-50Ω
DRAWN NO.	11-0198
FILE PATH:	

APPROVED	DATE
CHECKED	DATE
DRAWN	DATE