


- NOTE:
1. Impedance: 50Ω
 2. Frequency Range: DC 0-11 GHz
 3. V.S.W.R.: 1.3 MAX. @ 6GHz
 4. Voltage Rating: 1500V rms
 5. Contact Resistance: Center Contacts: 1.0 mΩ Max
Outer Contacts: 1.0 mΩ Max
 6. Insulation Resistance: 5000 MΩ MIN.
 7. Interface in Accordance With: MIL-STD 348A
 8. Operating Temperature Range: -65°~165°C
 9. ROHS Compliance.

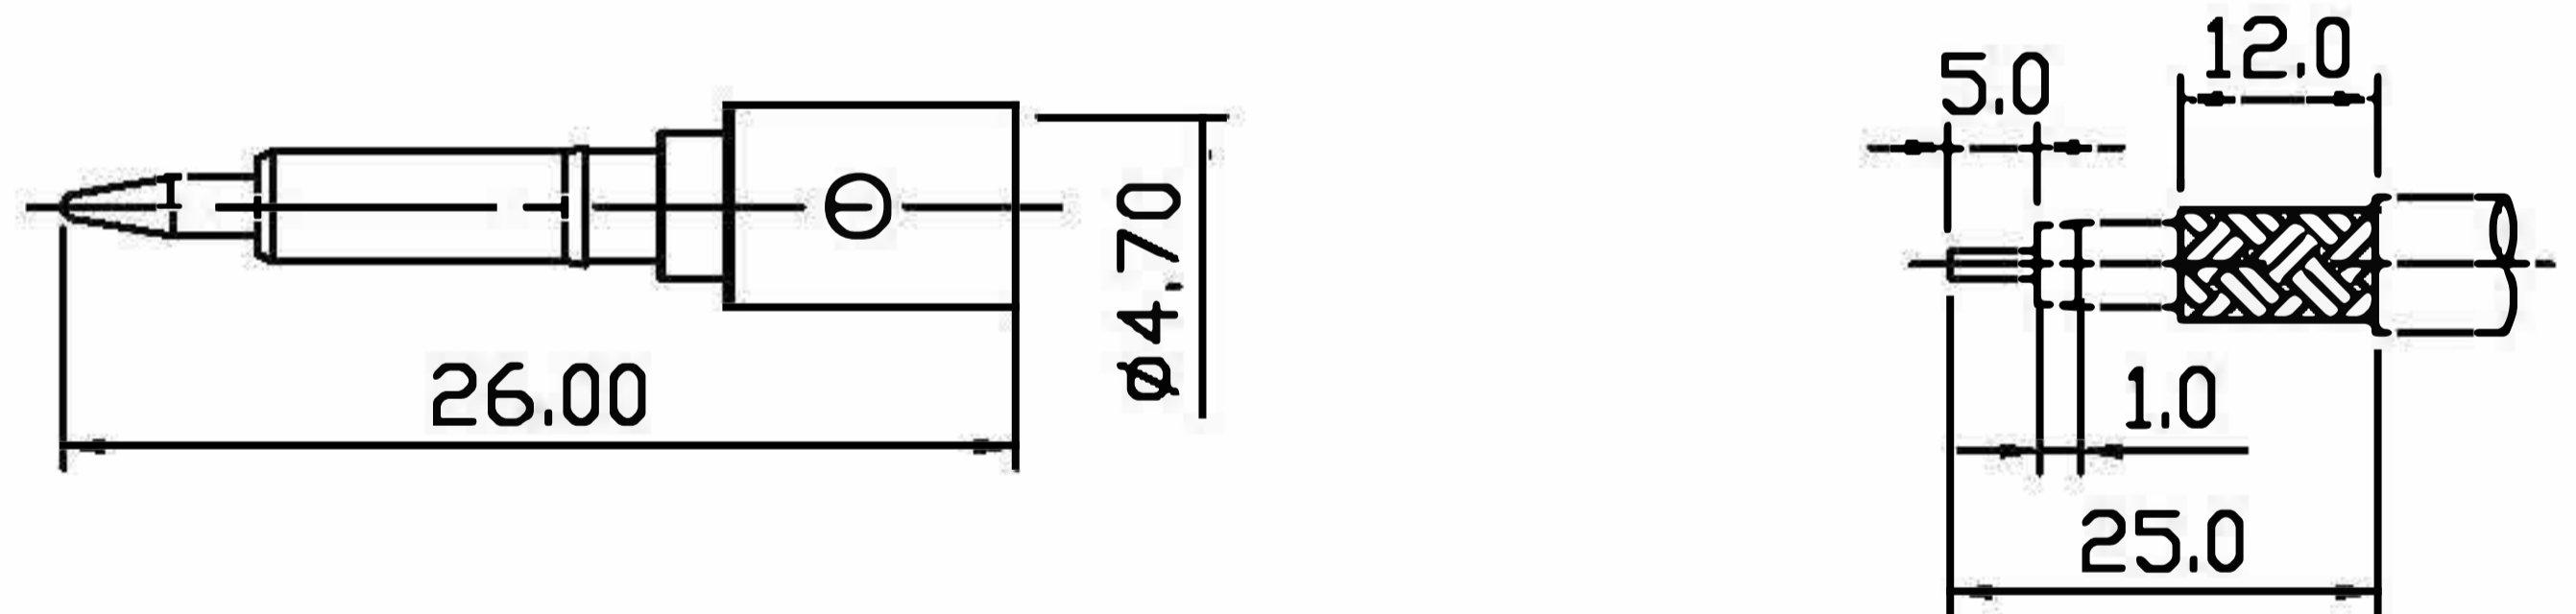

STRIPPING DIMENSION

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.	SCALE	2/1	ISSUE	A-0	FILE PATH:
9	HEAT TUBING	PE	BLACK	1	H-0068					
8	FERRULE	BRASS	WHITE BRONZE	1	M-0403					
7	BODY	BRASS	WHITE BRONZE	1	B-0916					
6	INSULATOR	TEFLON	NONE	1	T-0593					
5	WASHER	BRASS	NONE	1	G-0019					
4	CHASSIS	BRASS	WHITE BRONZE	1	E-0029					
3	GASKET	SILICONE	NONE	1	R-0004					
2	CENTER CONTACT	BRASS	GOLD	1	C-0759					
1	SHELL	BRASS	WHITE BRONZE	1	A-0083					

TOLERANCES		TITLE
.X	±0.2	
.XX	±0.1	PART NO. 11-01-9-TWS600-50
.XXX	±0.05	
ANGLES	±5°	DRAWN NO. 11-0198
		FILE PATH:

		APPROVED	DATE
		CHECKED	DATE
		DRAWN	DATE

F
E
D
C
B
A

F
E
D
C
B
A

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8