



REVISION		
ISS	ZONE	DESCRIPTION

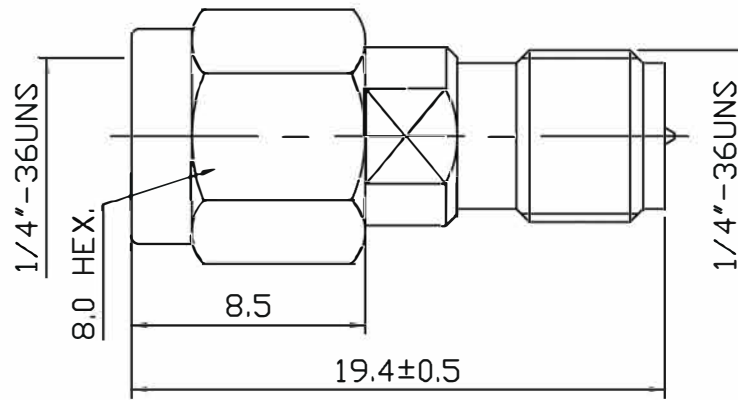

NOTE:
 1.Impedance: 50Ω
 2.Frequency Range: DC 0-18 GHz
 3.VSWR: 1.32 MAX.
 4.Voltage Rating: 750V rms
 5.Contact Resistance: Center Contacts: 2 mΩ Max
 Outer Contacts: 2 mΩ Max
 6.Insulation Resistance: 5000 MΩ MIN.
 7.Operating Temperature Range: -65°~165°C
 8.ROHS Compliance.

						TOLERANCES				TITLE	
						DIMENSIONS ARE IN MILLIMETER				RPSMA Plug to RPSMA Jack Adapter	
						UNLESS OTHERWISE SPECIFIED				PART NO.	
6	BODY	BRASS	GOLD	1	B-0453	.X		±0.2	RPSMAP-RPSMAJ		
5	CENTER CONTACT	Be Cu	GOLD	1	C-0683	.XX		±0.1			
4	INSULATOR	TEFLON	NONE	1	T-0497	.XXX		±0.05			
3	WASHER	STAINLESS STEEL	NONE	1	G-0002	ANGLES		±5°			
2	GASKET	SILICONE	NONE	1	R-0001						
1	SHELL	BRASS	GOLD	1	A-0002				FILE PATH:		
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.	SCALE	4/1	ISSUE	A-0		