


REVISION		
ISS	ZONE	DESCRIPTION
A-1		

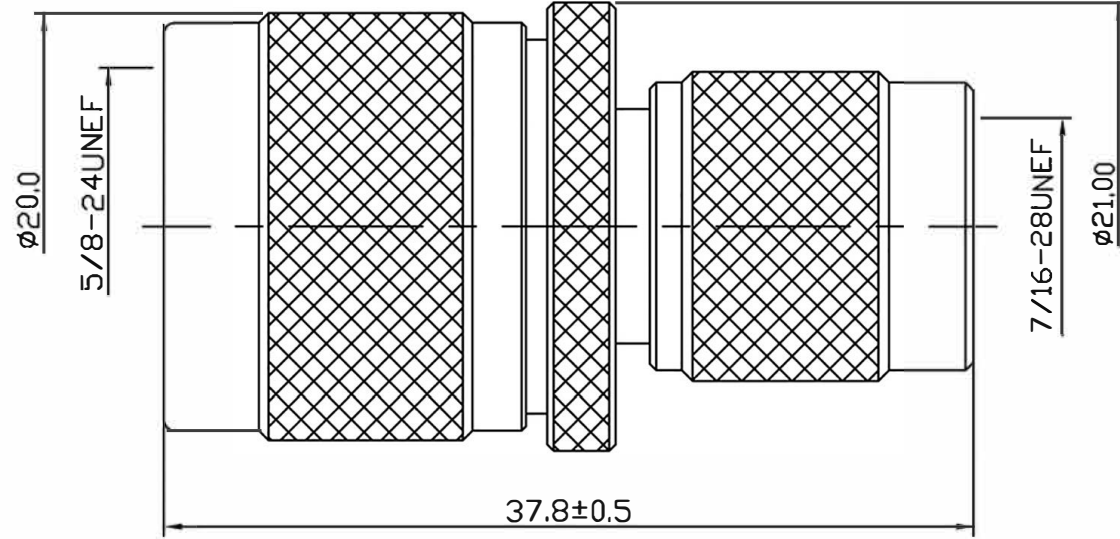

- NOTE:
- 1.Impedance:  $50\Omega$
  - 2.Frequency Range: DC 0-4 GHz
  - 3.V.S.W.R. :  $\leq 1.3$
  - 4.Voltage Rating: 1500V rms
  - 5.Contact Resistance: Center Contacts: 1.5 m $\Omega$  Max  
Outer Contacts: 0.5 m $\Omega$  Max
  - 6.Insulation Resistance: 5000 M $\Omega$  MIN.
  - 7.Interface in Accordance With: MIL-STD-348A
  - 8.Operating Temperature Range:  $-65^{\circ}\sim 165^{\circ}\text{C}$
  - 9.RDHS Compliance.

11	SHELL	BRASS	NICKEL	1	A-0010
10	CHASSIS	BRASS	NICKEL	1	E-0062
9	GASKET	SILICONE	NONE	1	R-0007
8	WASHER	BRASS	NONE	1	G-0023
7	CENTER CONTACT	BRASS	NICKEL	1	C-0257
6	BODY	BRASS	NICKEL	1	B-0342
5	WASHER	BRASS	NICKEL	1	G-0019
4	INSULATOR	TEFLON	NONE	1	T-0201
3	GASKET	SILICONE	NONE	1	R-0004
2	SLEEVE	BRASS	GOLD	1	E-0166
1	SHELL	BRASS	NICKEL	1	A-0009

TOLERANCES			
DIMENSIONS ARE IN MILLIMETER			
UNLESS OTHERWISE SPECIFIED			
.X	$\pm 0.2$		
.XX	$\pm 0.1$		
.XXX	$\pm 0.05$		
ANGLES	$\pm 5^{\circ}$		

TITLE	RPTNC Plug to N-Style Plug Adapter
PART NO.	RPTNCP-NP
DRAWN NO.	
FILE PATH:	

		APPROVED	DATE
		CHECKED	DATE
DRAWN	DATE		

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.	SCALE	3/1	ISSUE	A-1
-----	-------------	----------	--------	------	-----------	-------	-----	-------	-----