


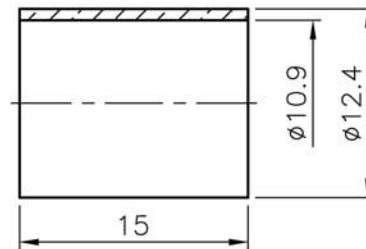


FOR CUSTOMER

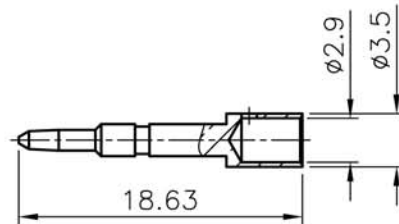


REMARK: RoHS COMPLIANT

REVISIONS		
ISS	SYMBOL	DESCRIPTION\DATE

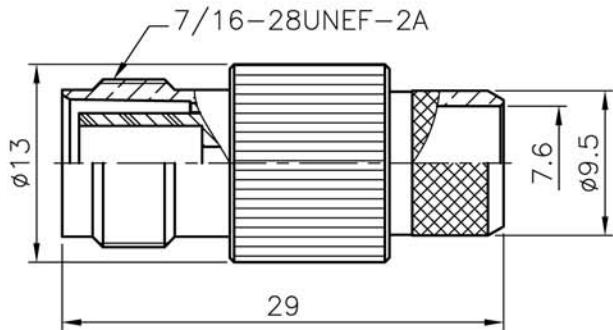

RECOMMENDED
CABLE STRIPPING DIM'S

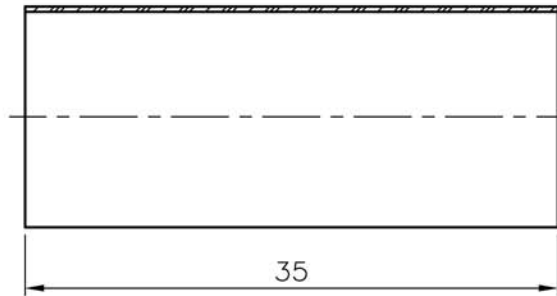

1. CRIMPED FERRULE
HEX CRIMP SIZE .429" (10.9mm)
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .118" (3mm) OR SOLDER

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 3. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 4. TEFLON MIL-P-19468
 5. BRASS JIS H 3250, C 2700

					DIMENSIONS ARE IN MILLIMETERS					PART NO.		TerraWave Solutions	
					UNLESS OTHERWISE SPECIFIED TOLERANCES					CON-01-400		TITLE	
	HEAT SHRINK TUBE		BLACK							APPROVED	DATE	RPTNC Jack for TWS-400 Cable	
	FERRULE	NOTE 5	NOTE 2							CHECKED	DATE	DRAWING NO.	
	CONTACT PIN	NOTE 1	NOTE 3							DRAWN	DATE	FILE NO.	
	C RING	NOTE 1	NOTE 2										
	INSULATOR	NOTE 4	WHITE										
	BODY	NOTE 1	NOTE 2										
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	2/1	ISSUE	A1				

0.5~6 = ±0.2
 >6~30 = ±0.4
 >30~120 = ±0.6
 >120~315 = ±1
 >315~1000 = ±1.6
 ANGLES = ±5°