

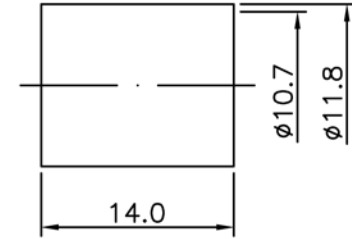



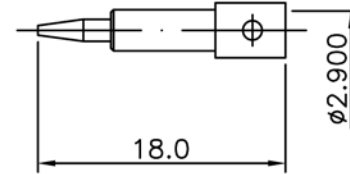


1 2 3 4 5 6 7 8

REVISION		
ISS	ZONE	DESCRIPTION

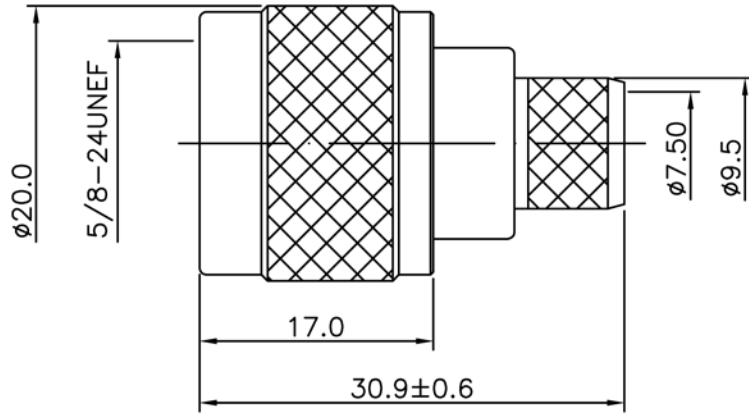

- NOTE:
- 1.Impedance: 50Ω
 - 2.Frequency Range: DC 0–11 GHz
 - 3.V.S.W.R.: 1.3 MAX.@6GHz
 - 4.Voltage Rating: 1500V rms
 - 5.Contact Resistance: Center Contacts: 1 mΩ Max
Outer Contacts: 1 mΩ Max
 - 6.Insulation Resistance: 5000 MΩ MIN.
 - 7.Interface in Accordance With: MIL-STD-348A
 - 8.Operating Temperature Range: -65°~165°C
 - 9.ROHS Compliance.

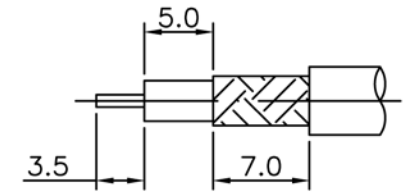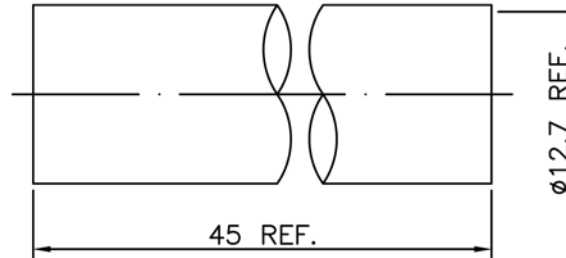

Recommended Stripping Dimensions

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.
10	HEAT TUBING		NONE	1	H-0045
9	FERRULE	BRASS	NICKEL	1	M-0150
8	PIN	BRASS	GOLD	1	C-0394
7	BARREL	BRASS	NICKEL	1	E-0090
6	BODY	BRASS	NICKEL	1	B-0832
5	INSULATOR	TEFLON	NONE	1	T-0490
4	WASHER	BRASS	NICKEL	1	G-0019
3	CHASSIS	BRASS	NICKEL	1	E-0029
2	GASKET	SILICONE	NONE	1	R-0004
1	SHELL	BRASS	NICKEL	1	A-0009

TOLERANCES			
DIMENSIONS ARE IN MILLIMETER			
UNLESS OTHERWISE SPECIFIED			
.X		±0.2	
.XX		±0.1	
.XXX		±0.05	
ANGLES		±5°	

TITLE
N-Style Plug for TWS-400 Cable
PART NO.
CON-07-400
DRAWN NO.
FILE PATH:

TerraWave Solutions	
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.	SCALE	2/1	ISSUE	A-1	FILE PATH:
1										
2										
3										
4										
5										
6										
7										
8										

F
E
D
C
B
A

F
E
D
C
B
A