


1		2		3		4		5		6		7		8	
REVISION															
ISS	ZONE	DESCRIPTION													
A-1															
A-2															

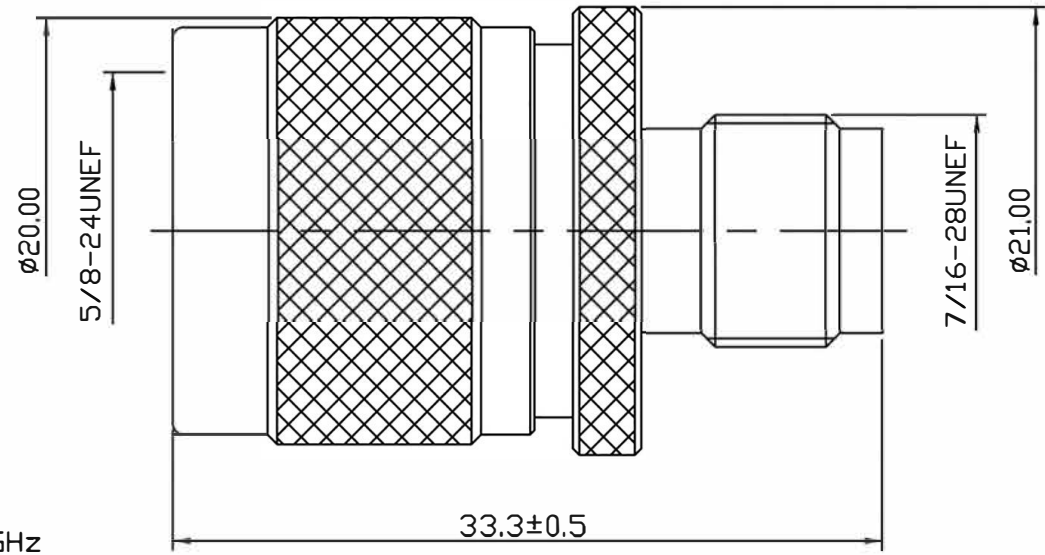

- NOTE:
1. Impedance:  $50\Omega$
  2. Frequency Range: DC 0-4 GHz
  3. V.S.W.R: 1.3 MAX.
  4. Voltage Rating: 500V rms
  5. Contact Resistance: Center Contacts: 1.5 m $\Omega$  Max  
Outer Contacts: 0.5 m $\Omega$  Max
  6. Insulation Resistance: 5000 M $\Omega$  MIN.
  7. Interface in Accordance With: MIL-STD 348A
  8. Operating Temperature Range: -55 $^{\circ}$ C~125 $^{\circ}$ C
  9. ROHS Compliance.

8	BODY B	BRASS	NICKEL	1	B-0212	TOLERANCES				TITLE			
7	CENTER CONTACT	BRASS	GOLD	1	C-0679	DIMENSIONS ARE IN MILLIMETER				RPTNC Jack to N-Style Plug Adapter			
6	INSULATOR	TEFLON	NONE	1	T-0494	UNLESS OTHERWISE SPECIFIED				PART NO.		APPROVED	DATE
5	BODY A	BRASS	NICKEL	1	B-0146	.X		$\pm 0.2$		RPTNCJACK-NPLUG		CHECKED	DATE
4	WASHER	BRASS	NICKEL	1	G-0019	.XX		$\pm 0.1$		DRAWN NO.		DRAWN	DATE
3	GASKET	SILICONE	NONE	1	R-0004	.XXX		$\pm 0.05$		FILE PATH:			
2	CHASSIS	BRASS	NICKEL	1	E-0166	ANGLES		$\pm 5^{\circ}$					
1	SHELL	BRASS	NICKEL	1	A-0009								
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.	SCALE	3/1	ISSUE	A-2				