


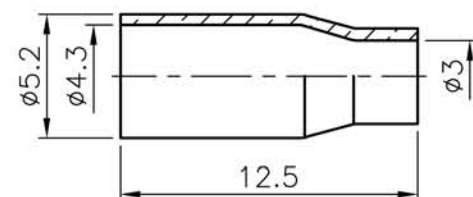
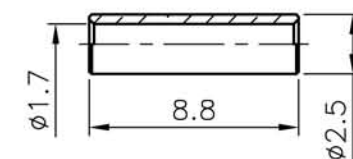



ISS	SYMBOL	DESCRIPTION\DATE

REMARK: RoHS COMPLIANT

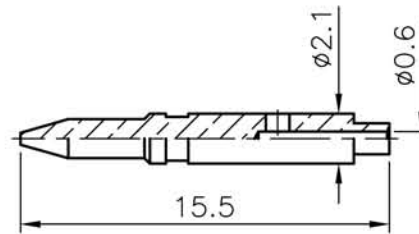


5/8-24UNEF-2B

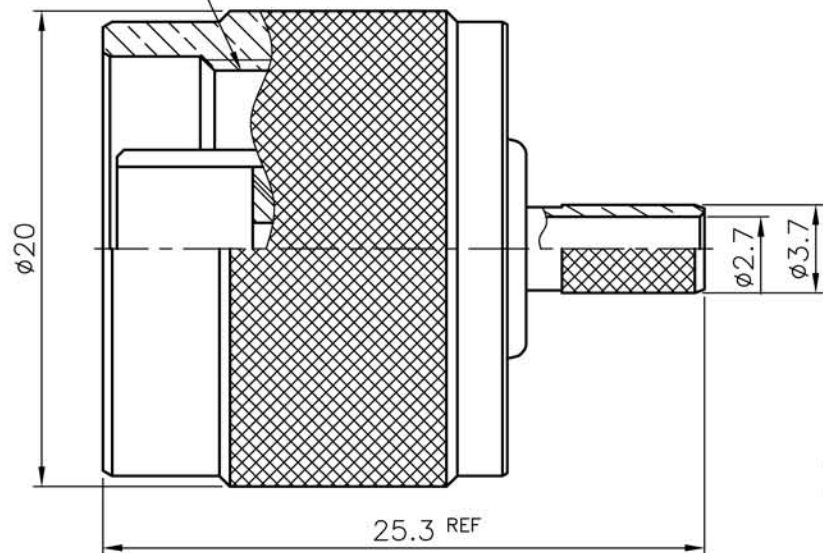

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 3 MIN THICK OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. BRASS JIS H 3250,C 2700

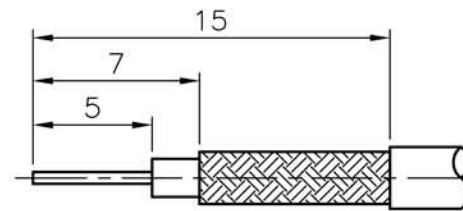

RECOMMENDED CABLE STRIPPING DIM'S

1. CRIMPED FERRULE
HEX CRIMP SIZE .178" (4.52mm)
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068" (1.72mm)

HEAT SHRINK TUBE		BLACK		
FERRULE	NOTE 5	NOTE 2		
SPACER	NOTE 1	NOTE 2		
SPACER	NOTE 4	WHITE		
CONTACT PIN	NOTE 1	NOTE 3		
SHELL	NOTE 1	NOTE 2		
C RING	NOTE 5	NOTE 2		
GASKET	SILICONE	ORANGE		
INSULATOR	NOTE 4	WHITE		
BRAID HOLDER	NOTE 1	NOTE 2		
BODY	NOTE 1	NOTE 2		

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED TOLERANCES

0.5~6 = ±0.2
>6~30 = ±0.4
>30~120 = ±0.6
>120~315 = ±1
>315~1000 = ±1.6
ANGLES = ±5'

PART NO.	CON-07-100	
APPROVED	DATE	
CHECKED	DATE	
DRAWN	DATE	

TerraWave Solutions	
N-Style Plug for TWS-100 Series Cable	
TITLE	
DRAWING NO.	
FILE NO.	

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	3/1	ISSUE	A1
-----	-------------	----------	--------	------	-------------	-------	-----	-------	----