


## 2.4/5 GHz 6 dBi MIMO Patch Antenna

The TerraWave 2.4/5 GHz 6 dBi MIMO Patch Antenna is ideal for high density venues such as lecture halls, stadiums and convention centers that require 2.4 /5 GHz frequency operation. It features a four-connector structure and has a low profile design with high gain. It supports 802.11a/b/g/n and MIMO. The antenna can be pole/mast mounted and includes a universal articulating mount. *All TerraWave antennas are covered by the company's two-year TerraNet warranty program. For questions or to purchase product, contact your Regional Sales Executive at 210-375-8482, 800-851-4965 or sales@terrawave.com.*

Specifications		
Model	M6060060P23D3620	
Frequency Range	2400 ~ 2500 MHz	5150 ~ 5850 MHz
Bandwidth	100 MHz	700 MHz
Gain	6 dBi	6 dBi
Horizontal Beamwidth	55° ± 10°	35° ± 10°
Vertical Beamwidth	55° ± 10°	35° ± 10°
Impedance	50 Ohms	
Polarization	Vertical	
VSWR	≤ 2	≤ 2.5
Maximum Power	20 Watts	
Connector	4 x RPSMA Plug	
Pigtail Length	36"	
Dimensions	10.3"x10.3"x1.4"	
Weight	2.31 lbs.	
Mounting	Mast Mounting	

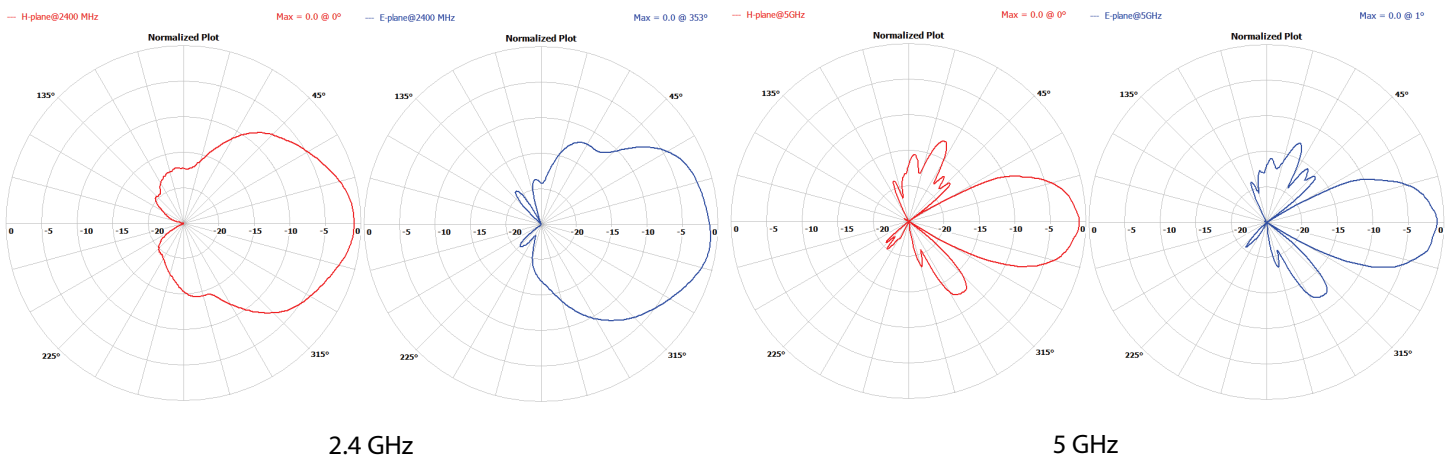

## 2.4/5 GHz 6 dBi MIMO Patch Antenna

### Installation Sketch

