

Outdoor Omni Antenna, 1-port 698-2700 MHz, N-Female Conn



- ❖ Omnidirectional antenna covering the 698-2700 MHz frequency range
- ❖ Rugged construction with fiberglass exterior ideal for use in any environment to withstand harsh weather conditions
- ❖ Included is mounting hardware for wall or mast mount installation

Connector Option	Product SKU	Ventev Part #
N Female	570938	M3060070010006OSS

For more information or to purchase, contact Ventev:
800.851.4965 or sales@ventev.com.


Electrical Specifications		
Frequency Bands, MHz	698-960	1710-2700
Polarization	Vertical	
Horizontal Beamwidth	360°	
Vertical Beamwidth	40°	20°
Gain, dBi	6	7
VSWR	≤ 2.0	
Max Input Power per Port, watts	50	
Impedance, ohm	50	
Mechanical Specifications		
Product Dimensions	3.0 x 26.7 in	
Input Connector	1 x N Female	
Radome	White Polycarbonate	
Operating Temperature	-40° C to + 70° C	
Mounting	Wall or Mast Mount (bracket and hardware included)	
Product Weight	2.2 lbs (1 Kg)	

Every Ventev antenna is RoHS compliant and covered by company's 2-year warranty program.


Outdoor Omni Antenna, 1-port 698-2700 MHz, N-Female Conn

Radiation Patterns



698-960 MHz

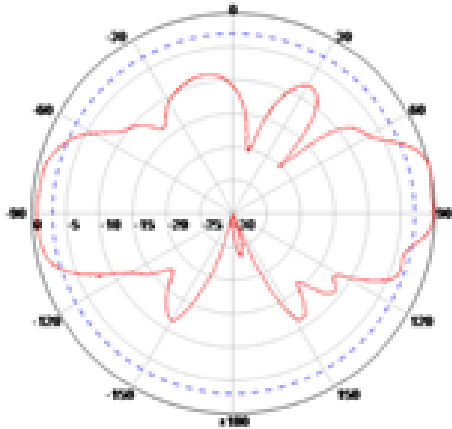

1710-2700 MHz

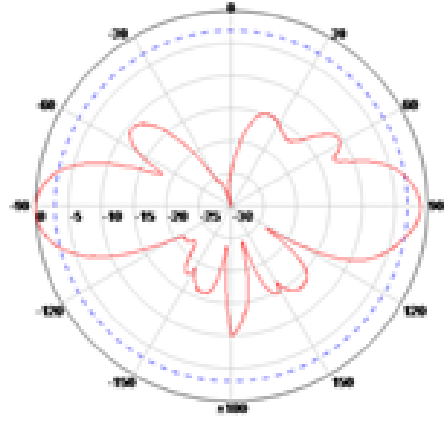

E Plane

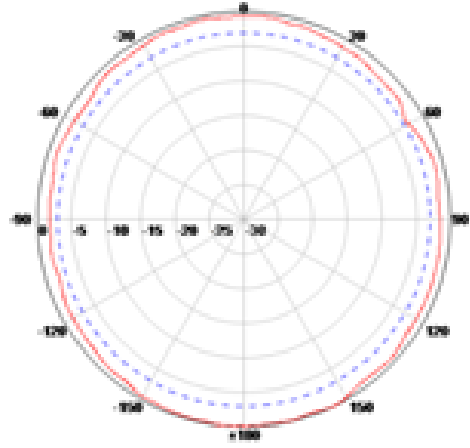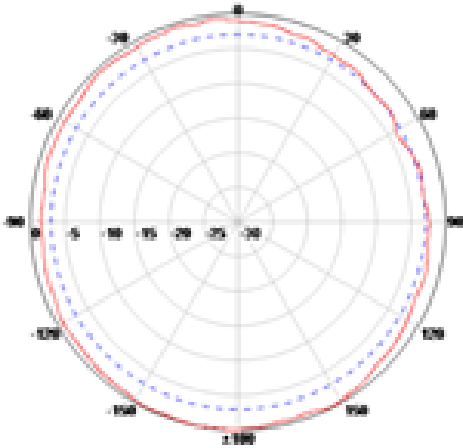

H Plane

MOUNT INFORMATION

