



Mounting Instructions

Step 1

The hard cap enclosure base is 18 x 18 in. with 4 holes 0.25 in. diameter located on 16 centers.

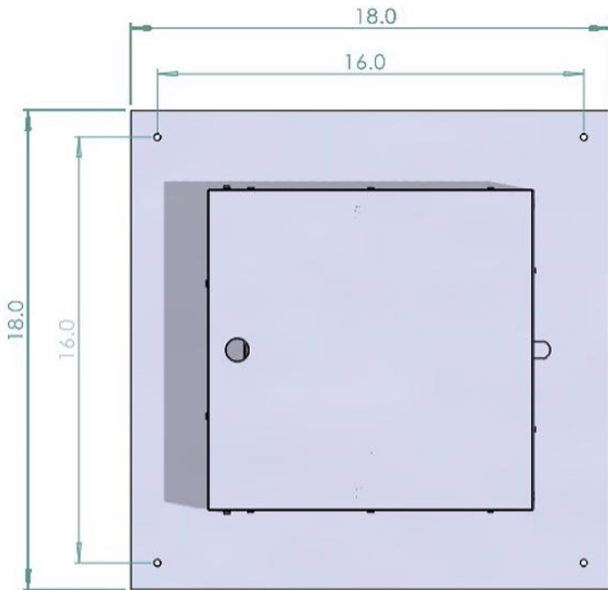


Figure 1

Step 2

Prepare the wall or ceiling by cutting a 14 x 14 in. hole for the base to be installed.

- If possible, locate the mounting holes on studs and use appropriate screws to secure the base.
- If drywall or other type of material use appropriate wall anchors.

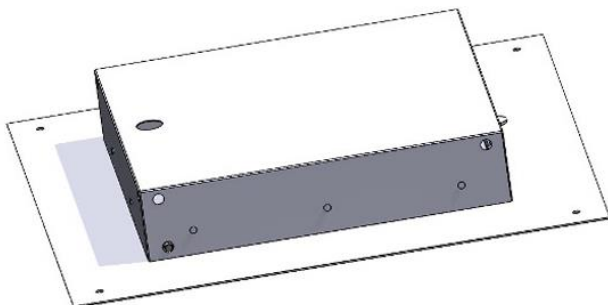


Figure 2

Step 3

Insert RJ45 cable through the entry hole located on the top of the base

Cisco Access Point Instructions

Step 4

Refer to Figure 3 below. Place door onto back side of AP.

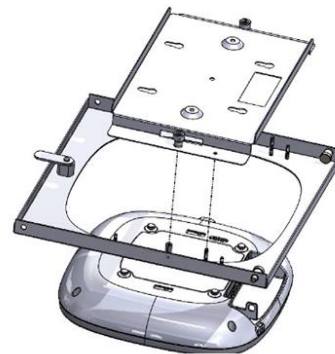


Figure 3

Step 5

Slide the AP mounting feet into the keyhole slots of the AP mounting bracket. The rectangular hole cut out in the AP mounting bracket aligns with the port entry console of the AP.

Step 6

Place the AP plus bracket onto the door using the long-threaded studs as guides and secure by tightening the two panel thumb screws.





Aruba Access Point Instructions

Step 4

Remove the black factory bracket from the back of the Aruba AP



Step 5

Place door onto back side of AP per Figure 4 below

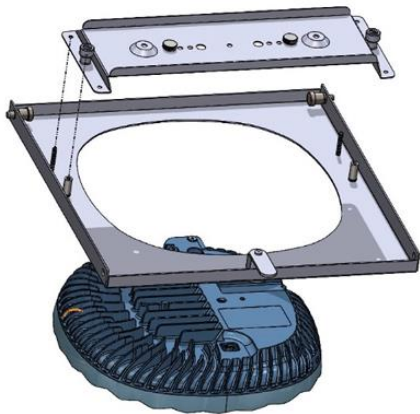


Figure 4

Step 6

Place AP bracket onto back side of AP and secure AP to bracket with provided thumb screws.

Step 7

Place the AP plus bracket onto door using the long-threaded studs as guides and secure by tightening the two panel thumb screws.

Step 8

Pull the pin head to retract and align it with the holes inside the ceiling mount in Figure 5 and release. A snap will be heard when the pin aligns with the hole.

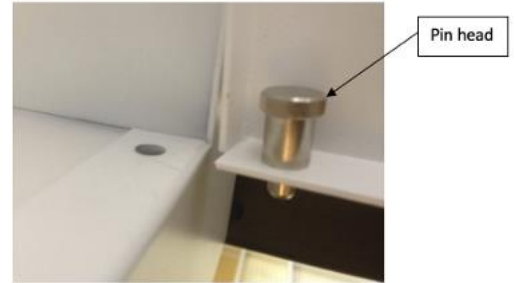


Figure 5

Step 9

Snap second pin so door hangs as shown in Figure 6

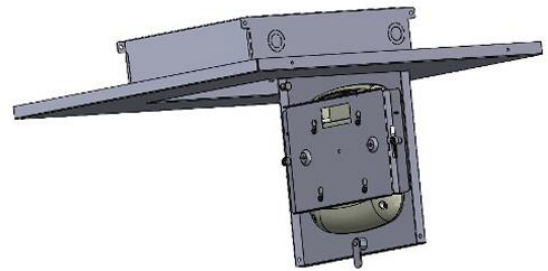


Figure 6

Step 10

Connect RJ45 cable to the access point

Step 11

Close the door and turn the lock to lock the enclosure door as shown in Figure 7

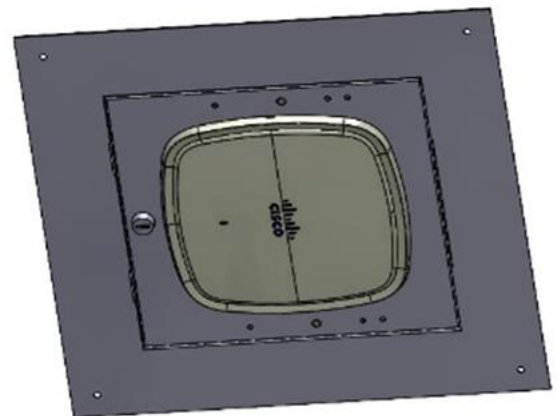


Figure 7