

# 2.4/5 GHz 2.5/4 dBi Wi-Fi Mini MIMO Omni Antenna

with 6 RPSMA Male Connectors

ventev

Connect, Protect, and Enable™


The 2.4/5 GHz ceiling mount multiple-input and multiple-output (MIMO) omnidirectional antenna is designed to be operated with any manufacturer's enterprise-class 802.11n MIMO access points (APs). The antenna features six integrated 2.4 and 5 GHz dual-band omni antennas in one enclosure, making it an ideal and aesthetically-pleasing antenna to support demanding applications in next generation IEEE 802.11n indoor wireless communication systems.

## Specifications


SKU	375087
Manufacturer Part Number	M6025040MO1D3620P
Operating Frequency Range	2.4/5 GHz
Gain	2.5/4 dBi
Polarization	Vertical
Vertical Beamwidth	55°/60°
Horizontal Beamwidth	360°
VSWR	≤ 2.0 / ≤ 2.5
Nominal Impedance	50 Ohms
Max Input Power	50 W
Number of Ports	6
Length of Lead	36 in.
RF Connector	RPSMA Male
Application	Indoor
Operating Temperature	-40° to 158°F
Dimensions	7.0 x 5.0 x 1.9 in.
Weight	0.68 lb.




## Radiation Patterns




2.4 GHz  
E Plane



5 GHz  
E Plane



2.4 GHz  
H Plane



5 GHz  
H Plane




All product specifications are subject to change without notice or obligation.

# 2.4/5 GHz 2.5/4 dBi Wi-Fi Mini MIMO Omni Antenna

with 6 RPSMA Male Connectors

## Mount Information

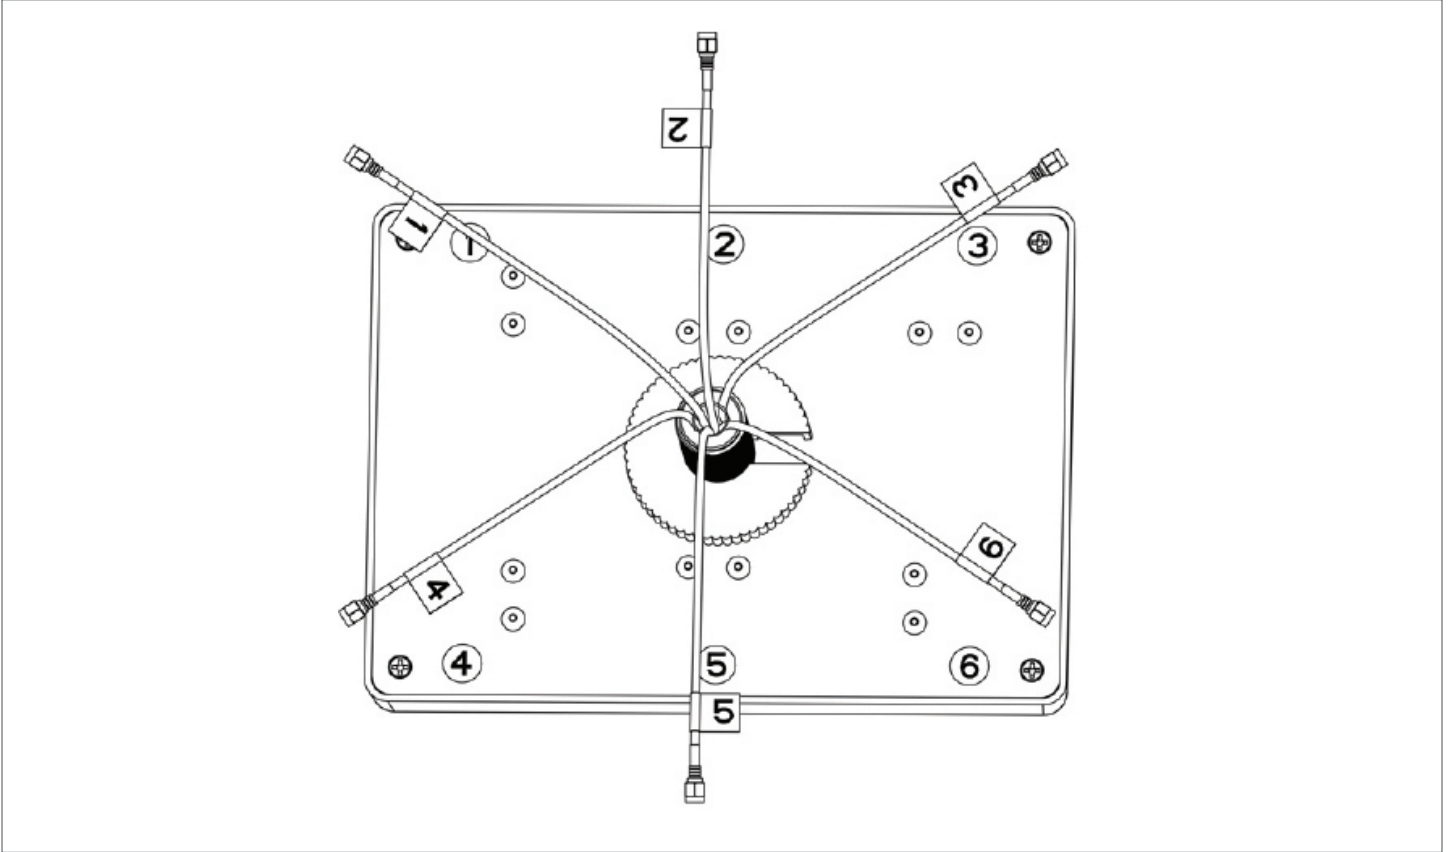

All product specifications are subject to change without notice or obligation.