


# Instructions- 14x12x6 NEMA 4X Enclosure with Integrated Omni Antenna


- Attach the mounting feet to the enclosure and hang enclosure in the desired location.
- Install the included cable gland on the box and run ethernet cable in.
- This enclosure is design to accommodate the Cisco Indoor 9130AXE access point. Orient the Cisco low profile bracket in orientation B. Attach mounting bracket to the back plate using QTY (4) #8 screws. See Figure 1.

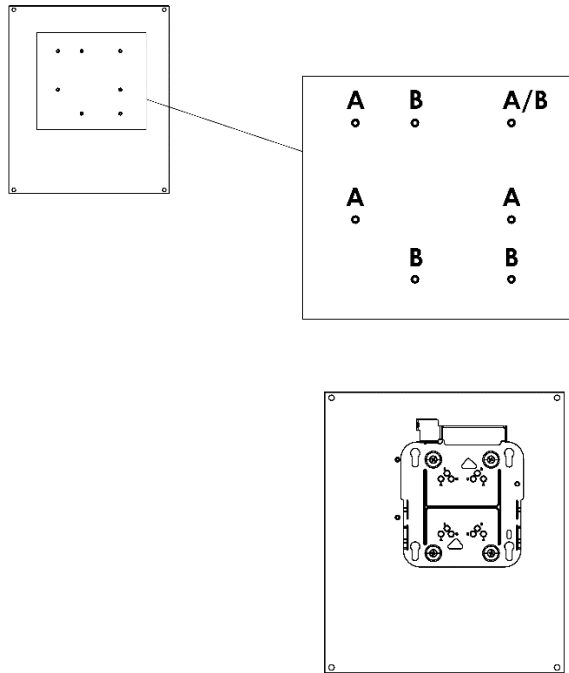

**B**

**Figure 1.**

- Plug in the ethernet cable and then slide the access point into the mounting bracket.

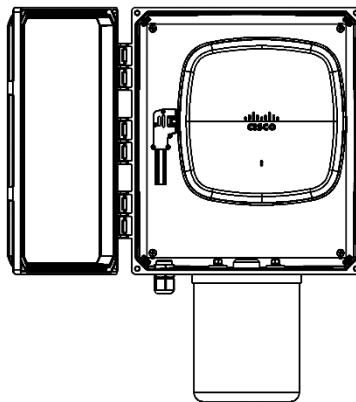

**Figure 2.**

- The Integrated Antenna comes with Right Angle DART connector lead. Firmly Plug in the DART connector to AP.