


2.4/5 GHz Dual Band Rubber Duck With RPSMA Plug Connector

TerraWave's compact dual-band omnidirectional antenna offers wide coverage giving the user the ease and flexibility of having only one antenna for any type of access point. It features 3.5/6 dBi gain (2.4/5 GHz frequencies) and its rugged design makes it suitable for a wide variety of applications. *Every TerraWave antenna is covered by the company's two-year TerraNet warranty program. For questions or to purchase product, contact your Regional Sales Executive at 210-375-8482, 800-851-4965 or sales@terra-wave.com.*

Specifications		
Frequency Range	2400~2500 MHz	4900~5875 MHz
Bandwidth	100 MHz	975 MHz
Gain	3.5 dBi	6 dBi
Vertical Beamwidth	70°	50°
Horizontal Beamwidth	360°	360°
VSWR	2.0 : 1 Max	
Nominal Impedance	50 Ohms	
Polarization	Linear, Vertical	
Power Handling	2 W (cw)	
Connector	RPSMA Plug	
Temperature	-10° C to +55° C	
Radome Color	Gray/Black/White	
Radome Material	ABS/Nylon	
Dimensions	5" x 0.95"	
Weight	0.05 lbs	



2.4 Ghz

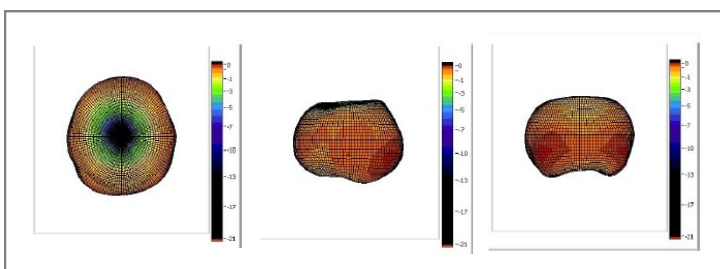

5 Ghz

