2.4/5/6 GHz 5/7/7 dBi Omni Antenna

with N Male Connector

Connect, Protect, and Enable*

Ventey's Tri-Band Fiberglass Antenna is designed to operate with any manufacturer's access point that utilizes N-Style Plug connectors. This antenna operates in the 2400-2500, 5150-5875 and 5925-7125 MHz frequency bands with a gain of 5, 7, and 7 dBi respectively. The antenna includes a direct N Male connector and is designed to support demanding wireless applications.

Available Antennas


| Antenna Color | MFG Part # | SKU |
|---------------|--------------------|--------|
| Black | M7050070MO1D10007G | 606999 |
| White | M7050070M01D10007 | 607002 |

Specifications

| Operating Frequency Range | 2.4/5/6 GHz |
|---------------------------|-----------------|
| Gain | 5/7/7 dBi |
| Polarization | Vertical |
| Vertical Beamwidth | 30° / 25° |
| Horizontal Beamwidth | 360° |
| VSWR | <u><</u> 2.0 |
| Nominal Impedance | 50 Ohms |
| Max Input Power | 50 W |
| Number of Ports | 1 |
| RF Connector | N Male |
| Application | Outdoor |
| Operating Temperature | -40° to 158°F |
| Dimensions | 14 x 1.4 in. |
| Weight | 0.6 lb. |
| Wind Rating | 124 mph |
| Ingress Protection | IP67 |



Radiation Patterns

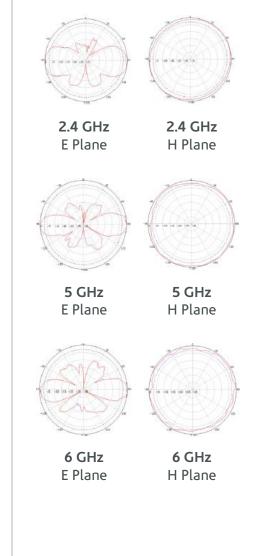



All product specifications are subject to change without notice or obligation.