REVISION		
ISS	ZONE	DESCRIPTION
A-1		

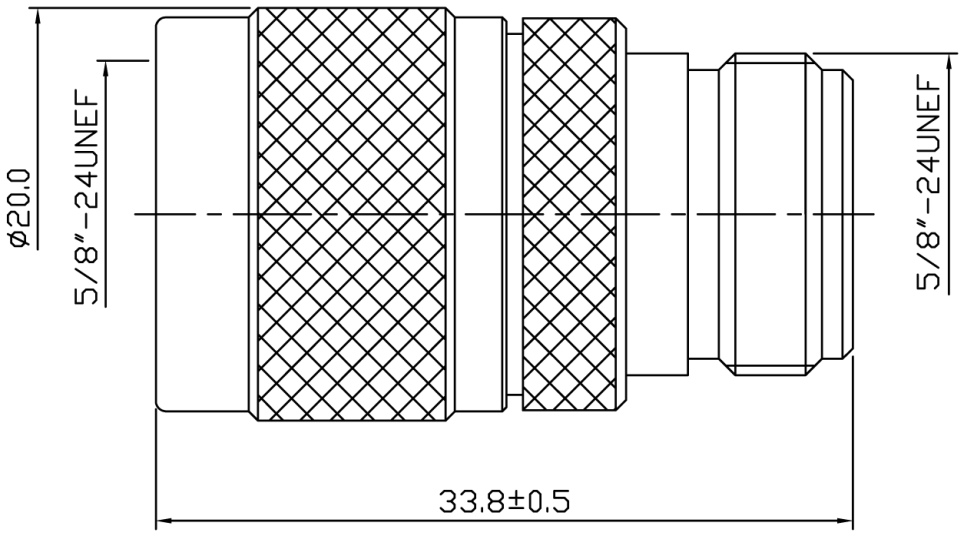

NOTE:
1.Impedance: 50Ω
2.Frequency Range: DC 0-11 GHz
3.V.S.W.R.: 1.3 MAX.
4.Voltage Rating: 1500V rms
5.Contact Resistance: Center Contacts: 1.0 mΩ
Outer Contacts: 1.0 mΩ
6.Interface in Accordance With: MIL-STD-348A
7.Operating Temperature Range: -65°~165°C
8.ROHS Compliance.

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.
7	CENTER CONTACT	BRASS	GOLD	1	C-0303
6	INSULATOR	TEFLON	NONE	1	T-0521
5	BODY	BRASS	NICKEL	1	B-0873
4	WASHER	BRASS	NONE	1	G-0019
3	GASKET	SILICONE	NONE	1	R-0004
2	CHASSIS	BRASS	NICKEL	1	E-0166
1	SHELL	BRASS	NICKEL	1	A-0009

TOLERANCES
DIMENSIONS ARE IN MILLIMETER

UNLESS OTHERWISE SPECIFIED

.X	±0.2
.XX	±0.1
.XXX	±0.05
ANGLES	±5°

SCALE	3/1	ISSUE	A-1

TITLE: N PLUG TO N JACK ADAPTOR

PART NO.: NP-NJ

DRAWN NO.:

FILE PATH:

APPROVED	DATE
CHECKED	DATE
DRAWN	DATE