

# 2.4/5 GHz 4/6 dBi Wi-Fi MIMO Omni Antenna

with 4 RA RPTNC Male Connectors

ventev

Connect, Protect, and Enable™


Ventev's 2.4/5 GHz 4/6 dBi small form factor ceiling mount multiple-input and multiple-output (MIMO) omnidirectional Wi-Fi antenna is designed to be operated with Cisco's latest 802.11ac Waves I & II WLAN access points. The antenna's appealing design maintains building decor while providing outstanding Wi-Fi connectivity. The 4 dual-band leads with right-angle connectors deliver exceptional performance while simplifying connection to the access point. Features a threaded plastic bushing and nut for simple ceiling tile mounting.

## Specifications


SKU	302021
Manufacturer Part Number	M6040060O2D1802R
Operating Frequency Range	2.4/5 GHz
Gain	4/6 dBi
Polarization	Vertical
Vertical Beamwidth	60°/70°
Horizontal Beamwidth	360°
VSWR	≤ 2.0 / ≤ 2.5
Nominal Impedance	50 Ohms
Max Input Power	2 W
Number of Ports	4
Length of Lead	18 in.
RF Connector	RA RPTNC Male
Application	Indoor
Operating Temperature	-40° to 158°F
Dimensions	5.4 x 2.9 x 1 in.
Weight	0.44 lb.



## Radiation Patterns



Vertical  
2.4 GHz



Vertical  
5 GHz



All product specifications are subject to change without notice or obligation.

# Title Line One


Title Line Two for items containing "with..."

Title Line Three for long items containing "with..."

ventev

Connect, Protect, and Enable™

## Mount Information

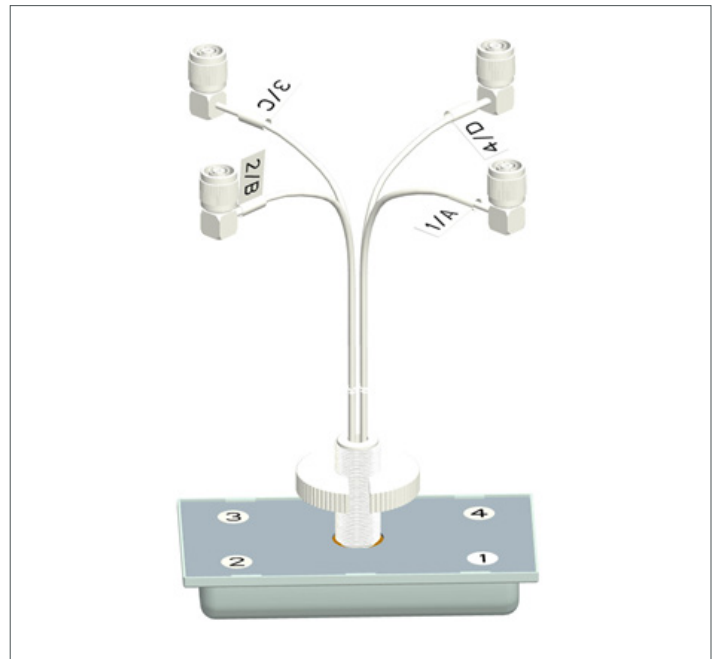

All product specifications are subject to change without notice or obligation.