

2.4/5/6 GHz 6 dBi Wi-Fi Flush Mount MIMO Patch Antenna

with 4 N-Male Connectors, Mounting Tabs, and 36 in. Leads

ventev®

Connect, Protect, and Enable™


Ventev's 2.4/5/6 GHz 6 dBi Flush Mount MIMO Patch Antenna is designed to operate with 802.11 n, ac & ax (Wi-Fi 6/6E) access points. The antenna features four tri-band antennas in a single unit, which allows engineers to simplify deployments by using only one antenna for access points with either dual or tri-band access points, and is engineered to mount on any flat surface.

Specifications

SKU	609446
Manufacturer Part Number	M7060060P1D43607MT
Operating Frequency Range	2.4/5/6 GHz
Polarization	Vertical
Horizontal Beamwidth	115°/120°/120°
Vertical Beamwidth	70°/60°/60°
Gain	6 dBi
VSWR	≤ 2.0
Max Input Power	50 W
Nominal Impedance	50 Ohms
Front-to-Back Ratio	≥ 20 dB
Isolation	≥ 15 dB
Number of Ports	4
Pigtail/Lead	RG58
Length of Lead	36 in.
RF Connector	N-Male
Operating Temperature	-40° to 158°F
Dimensions	10.8 x 6.8 x 1.4 in.
Weight	1.2 lbs.
Mounting Options	Flush
Radome	White UV Resistant ABS



Radiation Patterns

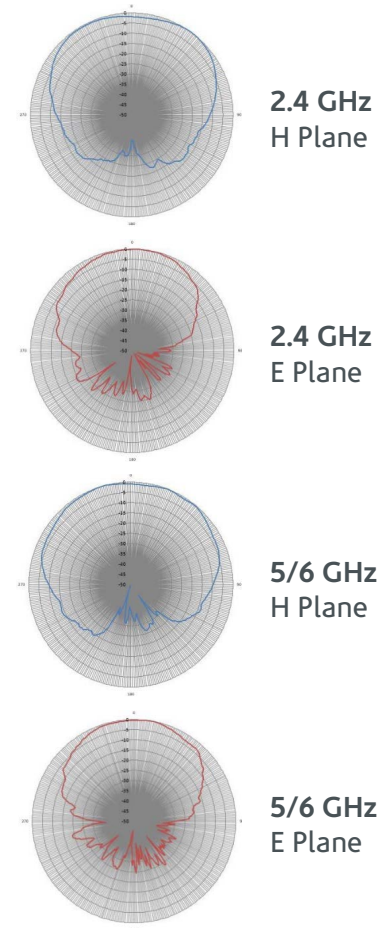

All product specifications are subject to change without notice or obligation.