


TerraWave® 2400-2500/4900-6000 MHz 12 dBi Directional Antenna

Specifications


SKU	610816
Manufacturer Part Number	M6120120MP1D43607
Number of Ports	4
Length of Lead	36 in.
RF Connector	RPSMA
Application	Indoor/Outdoor
Operating Temperature	-40° to 70°F
Dimensions	14.96 x 14.96 x 1.3 in.
Weight (Antenna Only)	1.7 lbs.
Mounting Options	Wall or Pole
Radome	White ABS
Connector Torque	0 N-m
Mechanical Tilt	-30° to 30°



Radiation Patterns



2.4 GHz



5 GHz

Electrical Specifications


Operating Frequency Range	2400-2500 MHz	4900-6000 MHz
Polarization	Vertical	
Horizontal Beamwidth	80°	110°
Vertical Beamwidth	18°	9°
Isolation	≥ 20 dB	≥ 23 dB
Gain	12 dBi	
VSWR	≤ 2.0	
Max Input Power	50 W	
Nominal Impedance	50 Ohms	



All product specifications are subject to change without notice or obligation.

TerraWave® 2400-2500/4900-6000 MHz 12 dBi Directional Antenna

Antenna & Mount Information

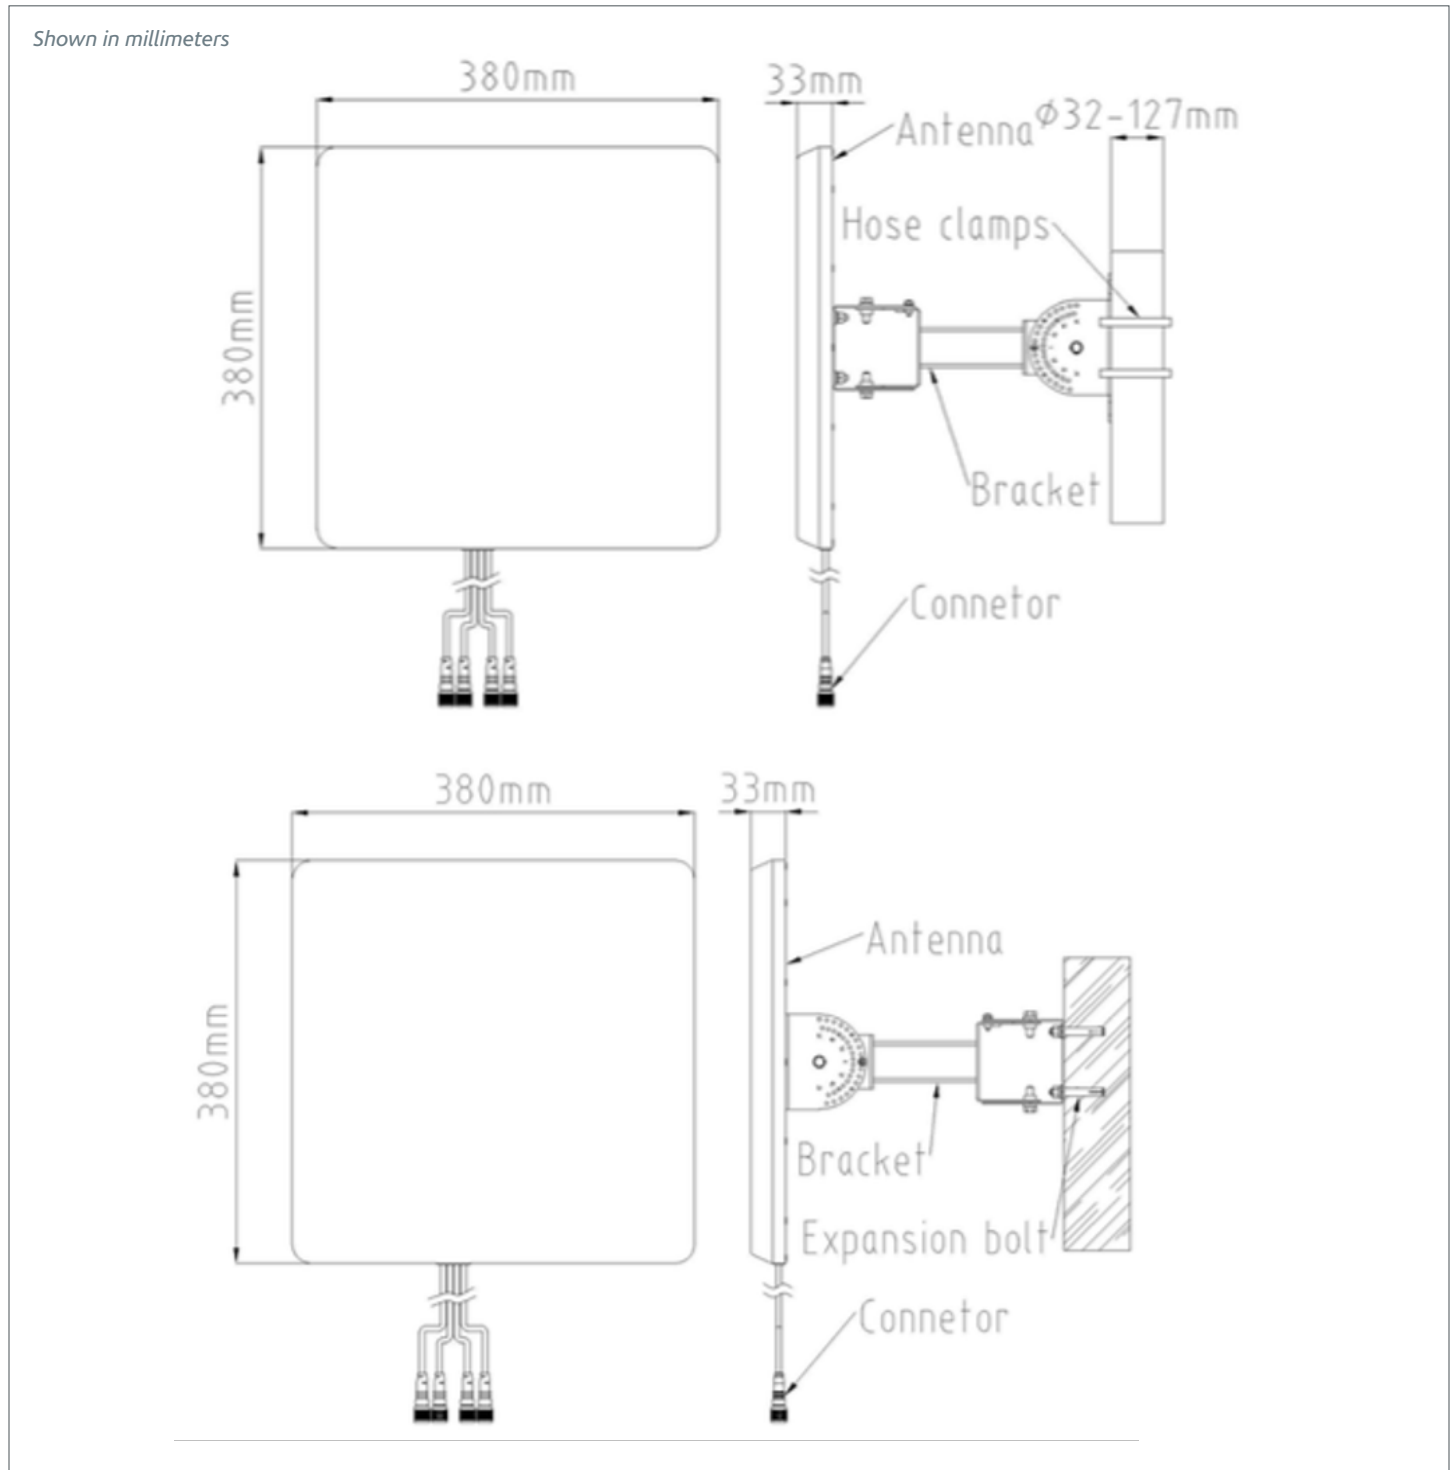

All product specifications are subject to change without notice or obligation.